


∅2.05±0.03 ▼


23.50±0.30

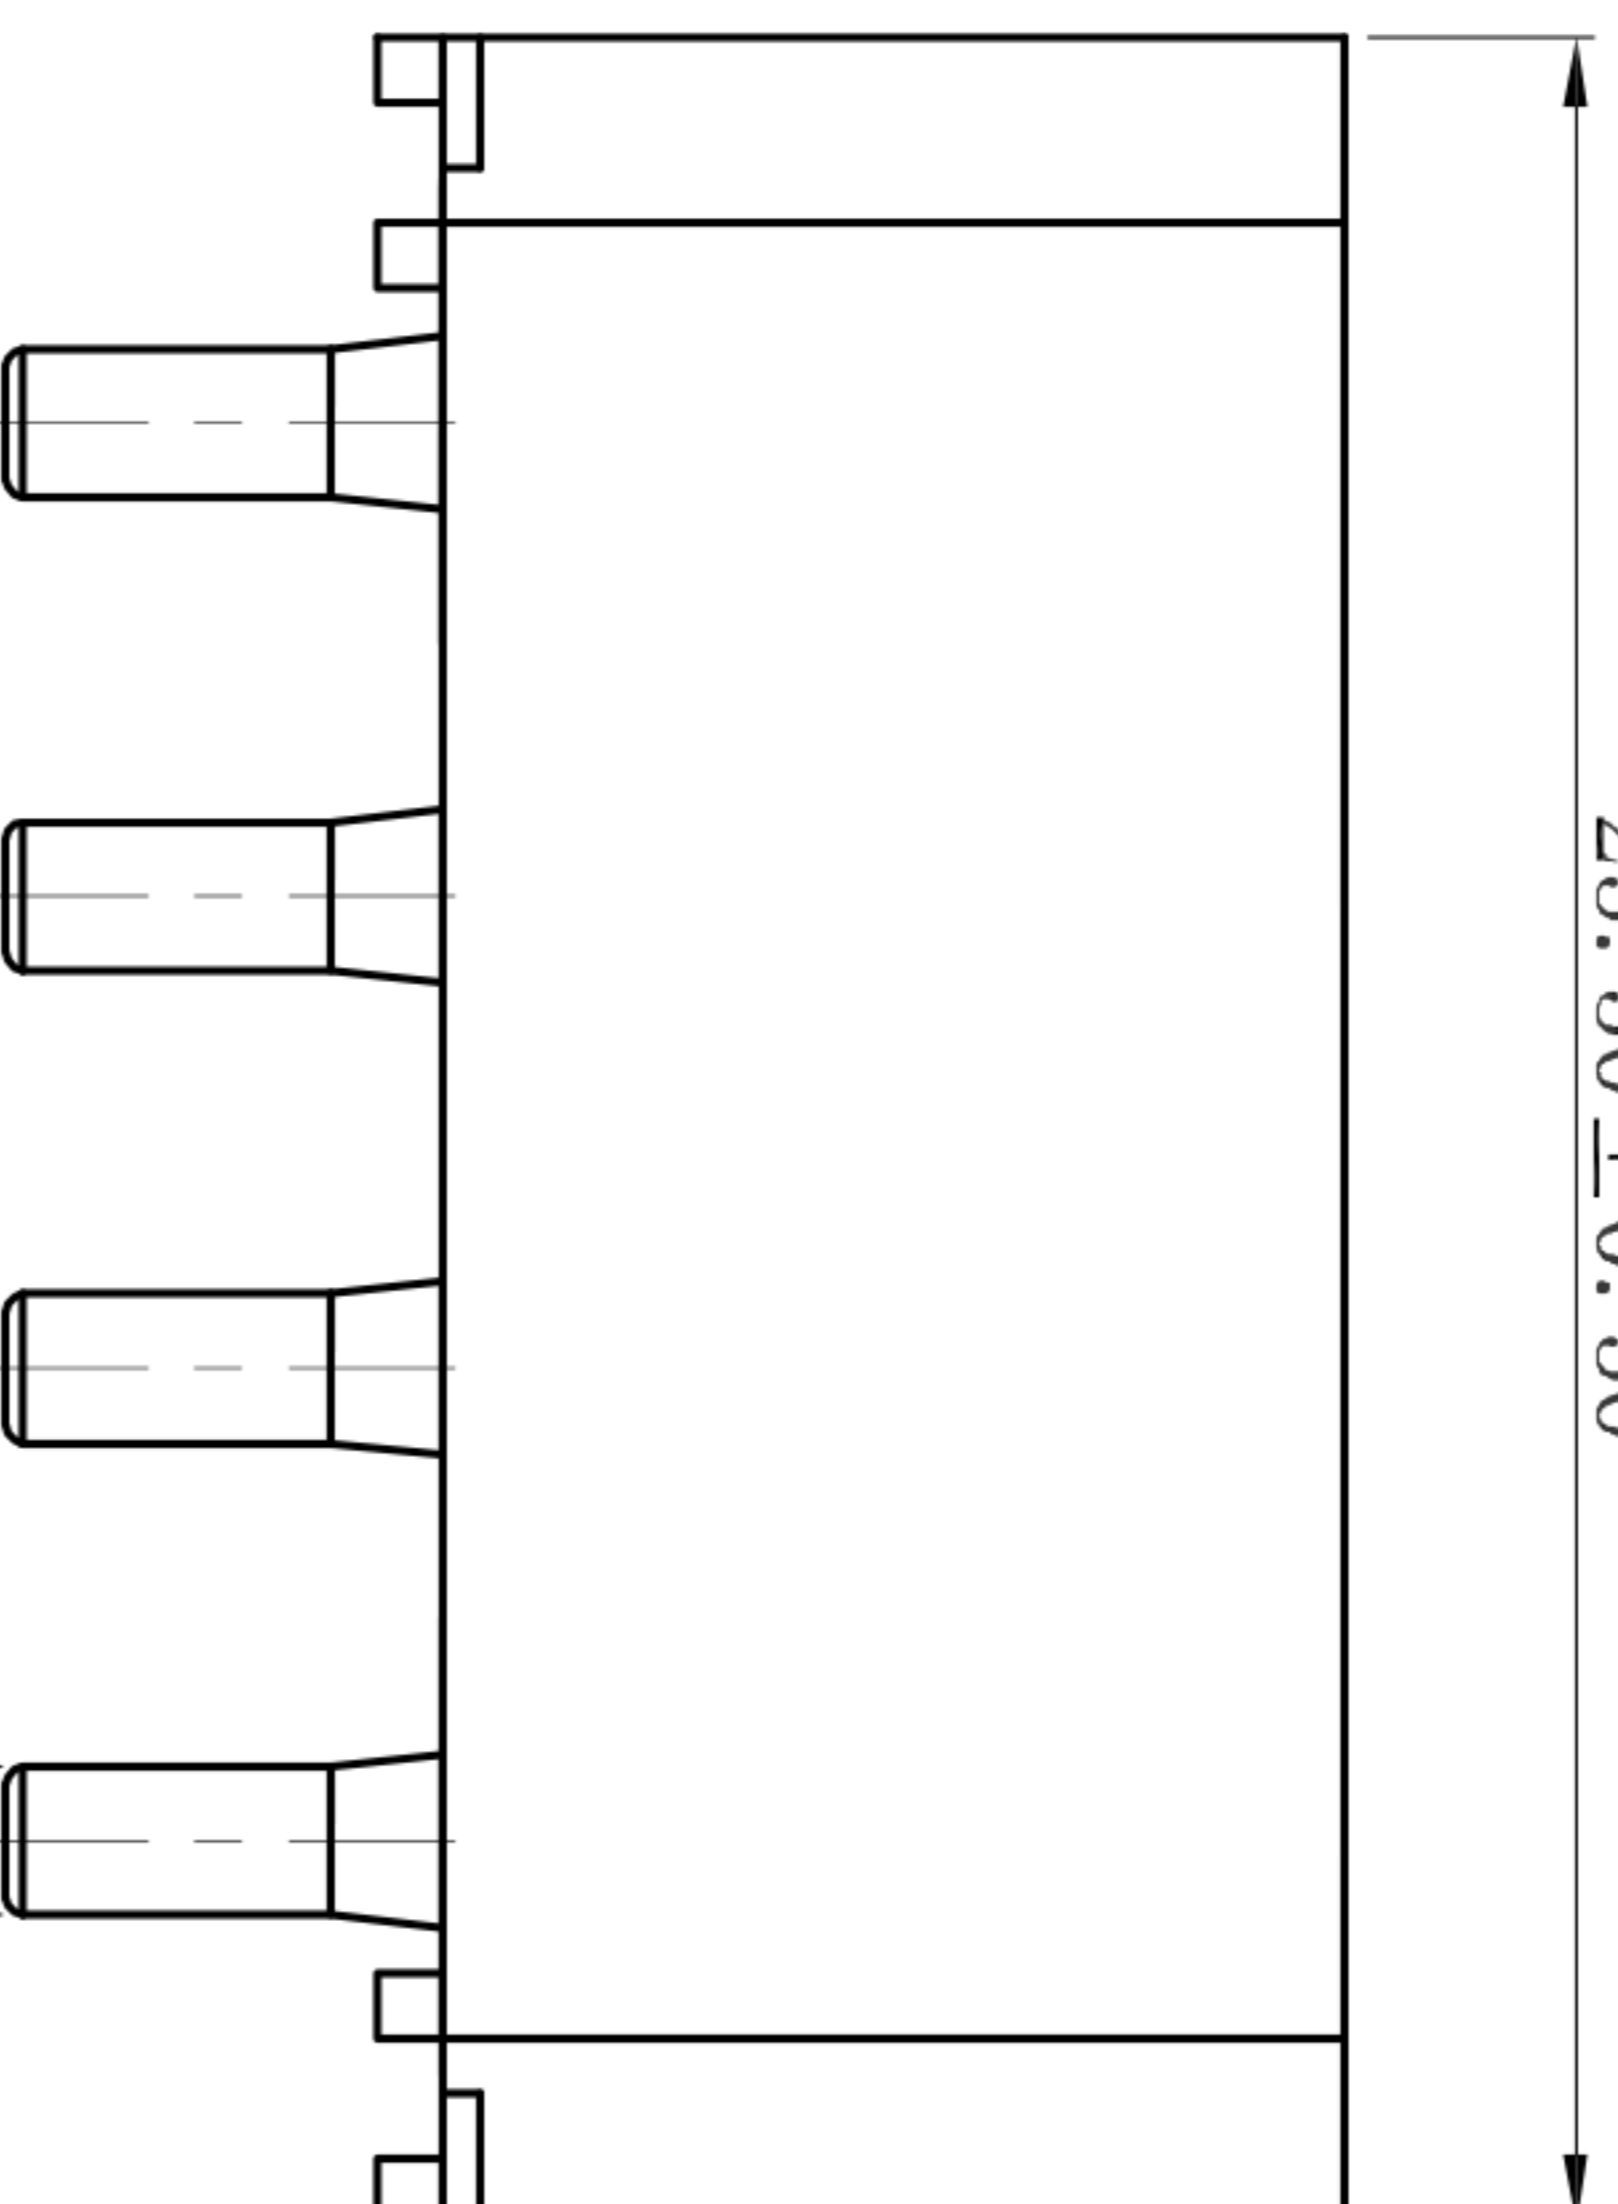

▼ 5.08±0.10


▼ 15.24±0.20

∅1.60±0.05 ▼

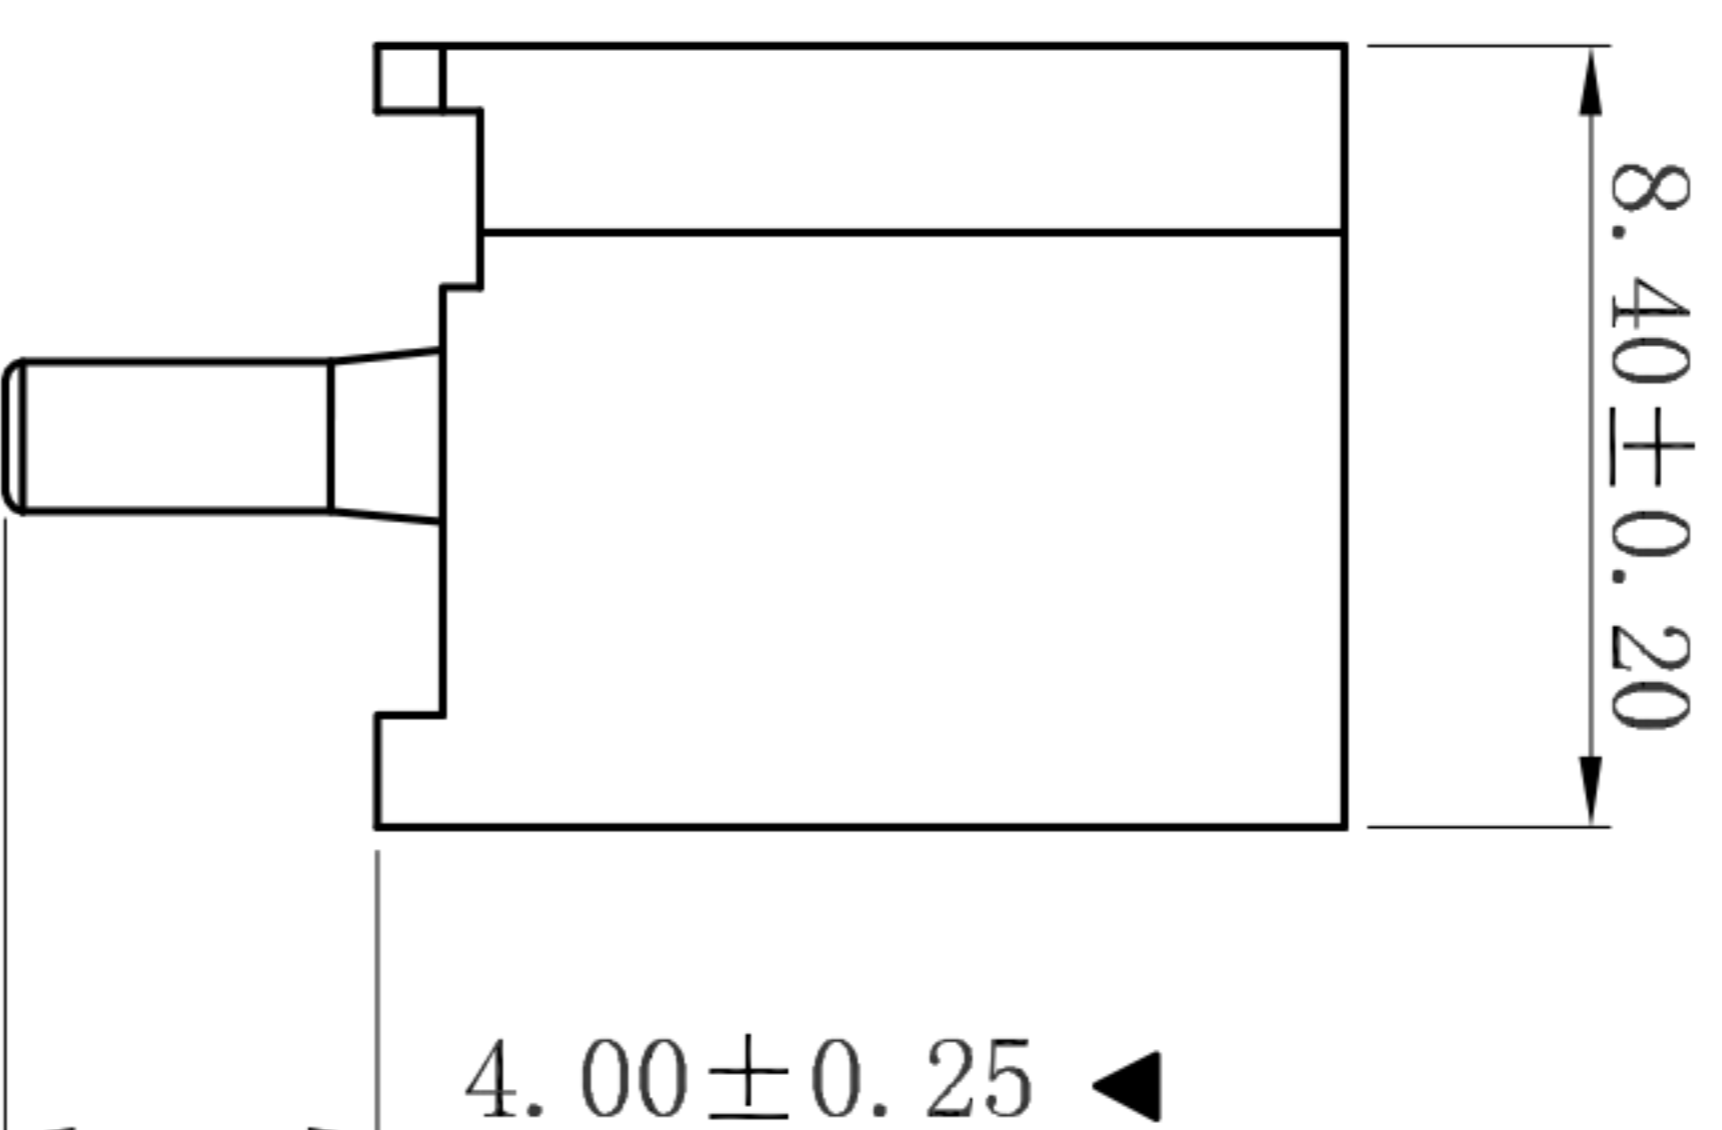

8.40±0.20

▼ 4.00±0.25

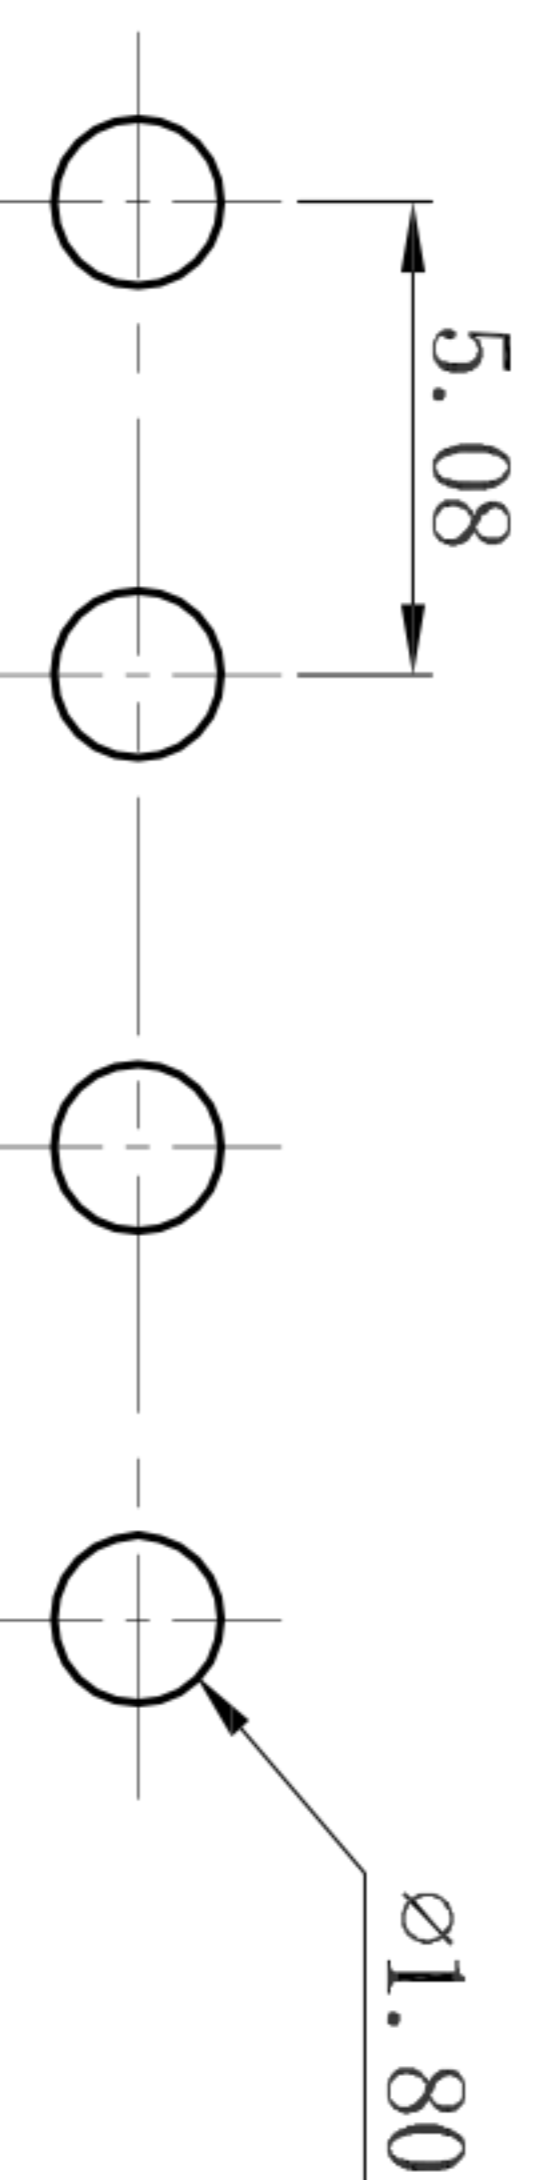

5.08

∅1.80


P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : 5082WV-04P-2
- Housing Material: PA66 UL94V-2 or UL94V-0
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

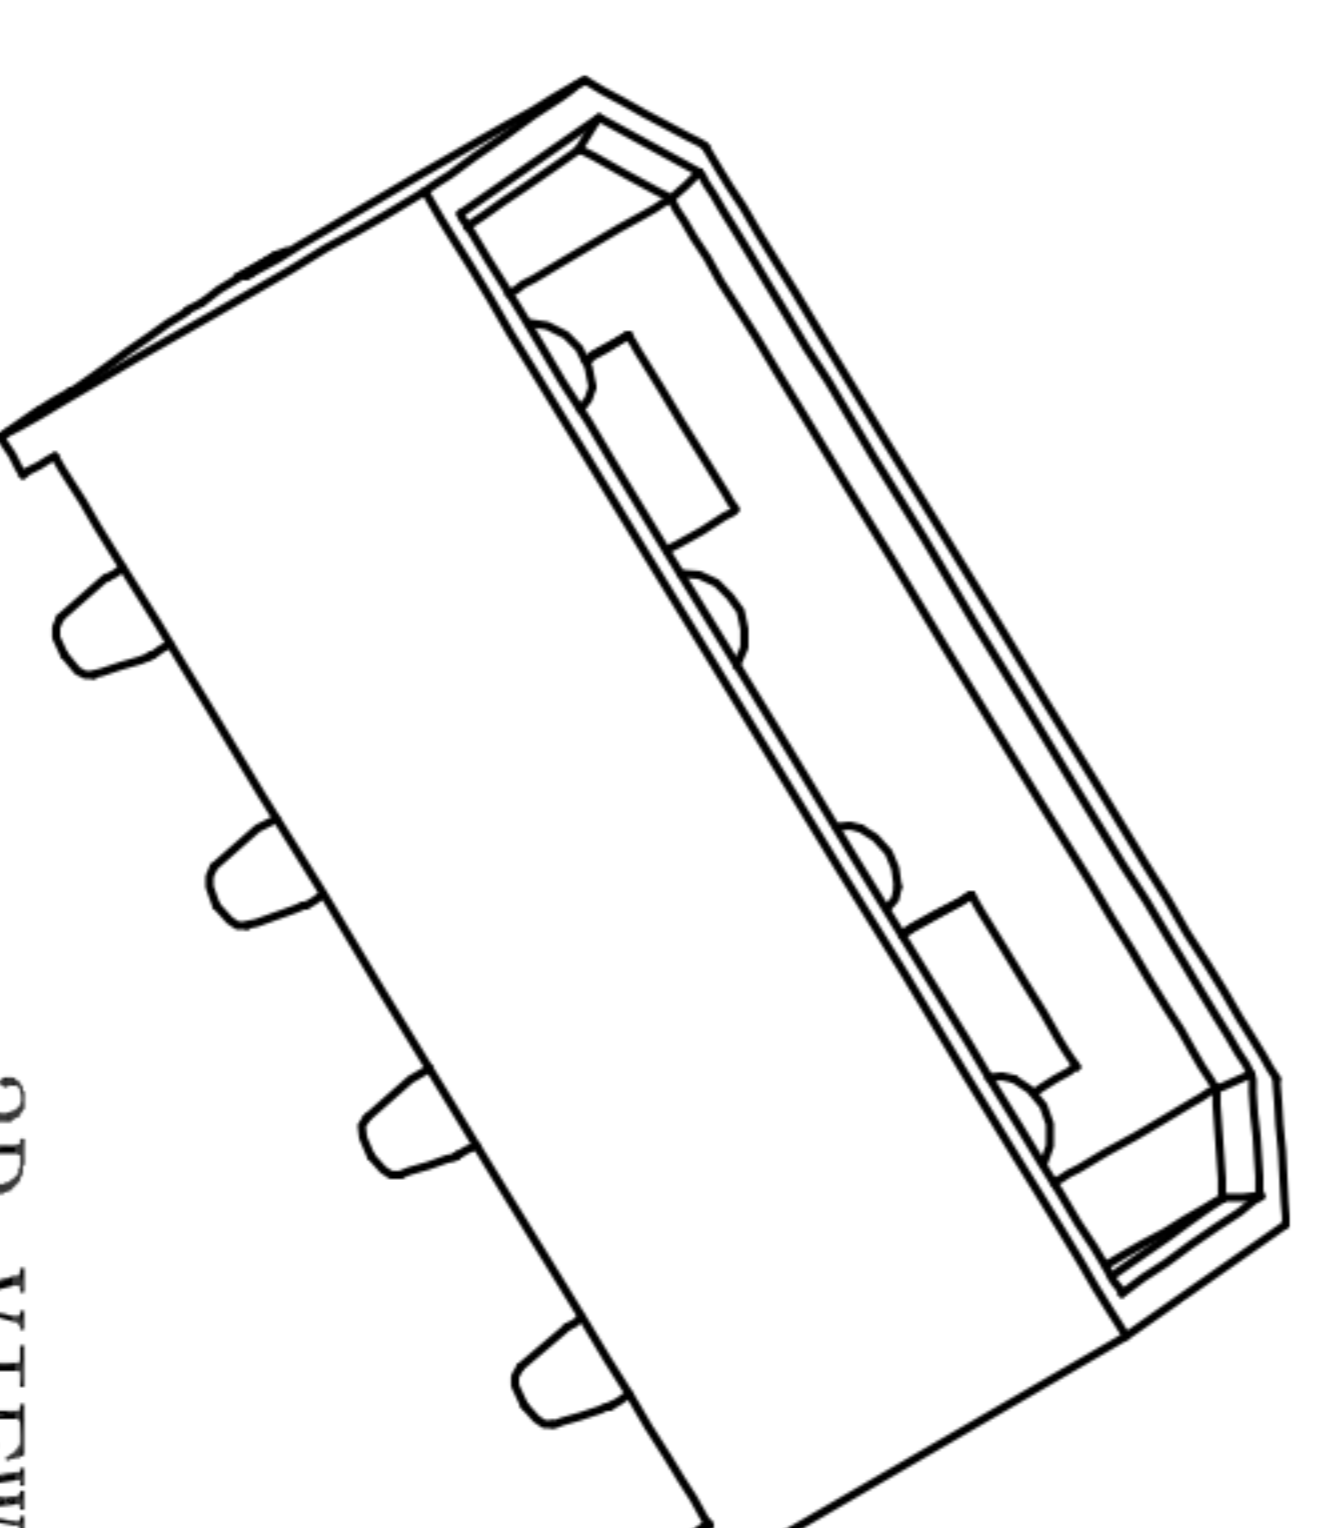

3D VIEW

| | | | | | | |
|---------|------|-------|--------------|---------|--------|--------|
| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
| | A | | NEW | | | |

| | | | | | | |
|----------------|-------------|------------|--|----------------|-------------|------------------|
| APPROVALS | | DATE | <p>深圳市联丰电子有限公司 SHENZHEN LINFENG ELECTRONIC CO.,LTD</p> | | | |
| DRAWN | ZHIWEI.CHEN | 2015.07.07 | TITLE: | 5.08mm 180° 实心 | PART NO. | GP01-5082WV-4P-2 |
| CHECKED | | | UNIT: | mm | SCALE: | 1:1 |
| APPROVALS | | | ANGLE | ±2° | DRAWING NO. | |
| TOLERANCES ARE | | | 30~∅以上 | ±0.30 | PROJ: | |
| | | | 10~30 | ±0.20 | SHEET | 1 OF 1 |
| | | | 5~10 | ±0.15 | | |
| | | | ~ 5 | ±0.10 | | |