


P. C. B. LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M $\Omega$  min
- Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- Contact resistance: 20m $\Omega$  max

■ WAFER

- Part No. : 3045WV-1xNP
- Poles : 02-12P
- Housing Material: Nylon66 15%GF UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

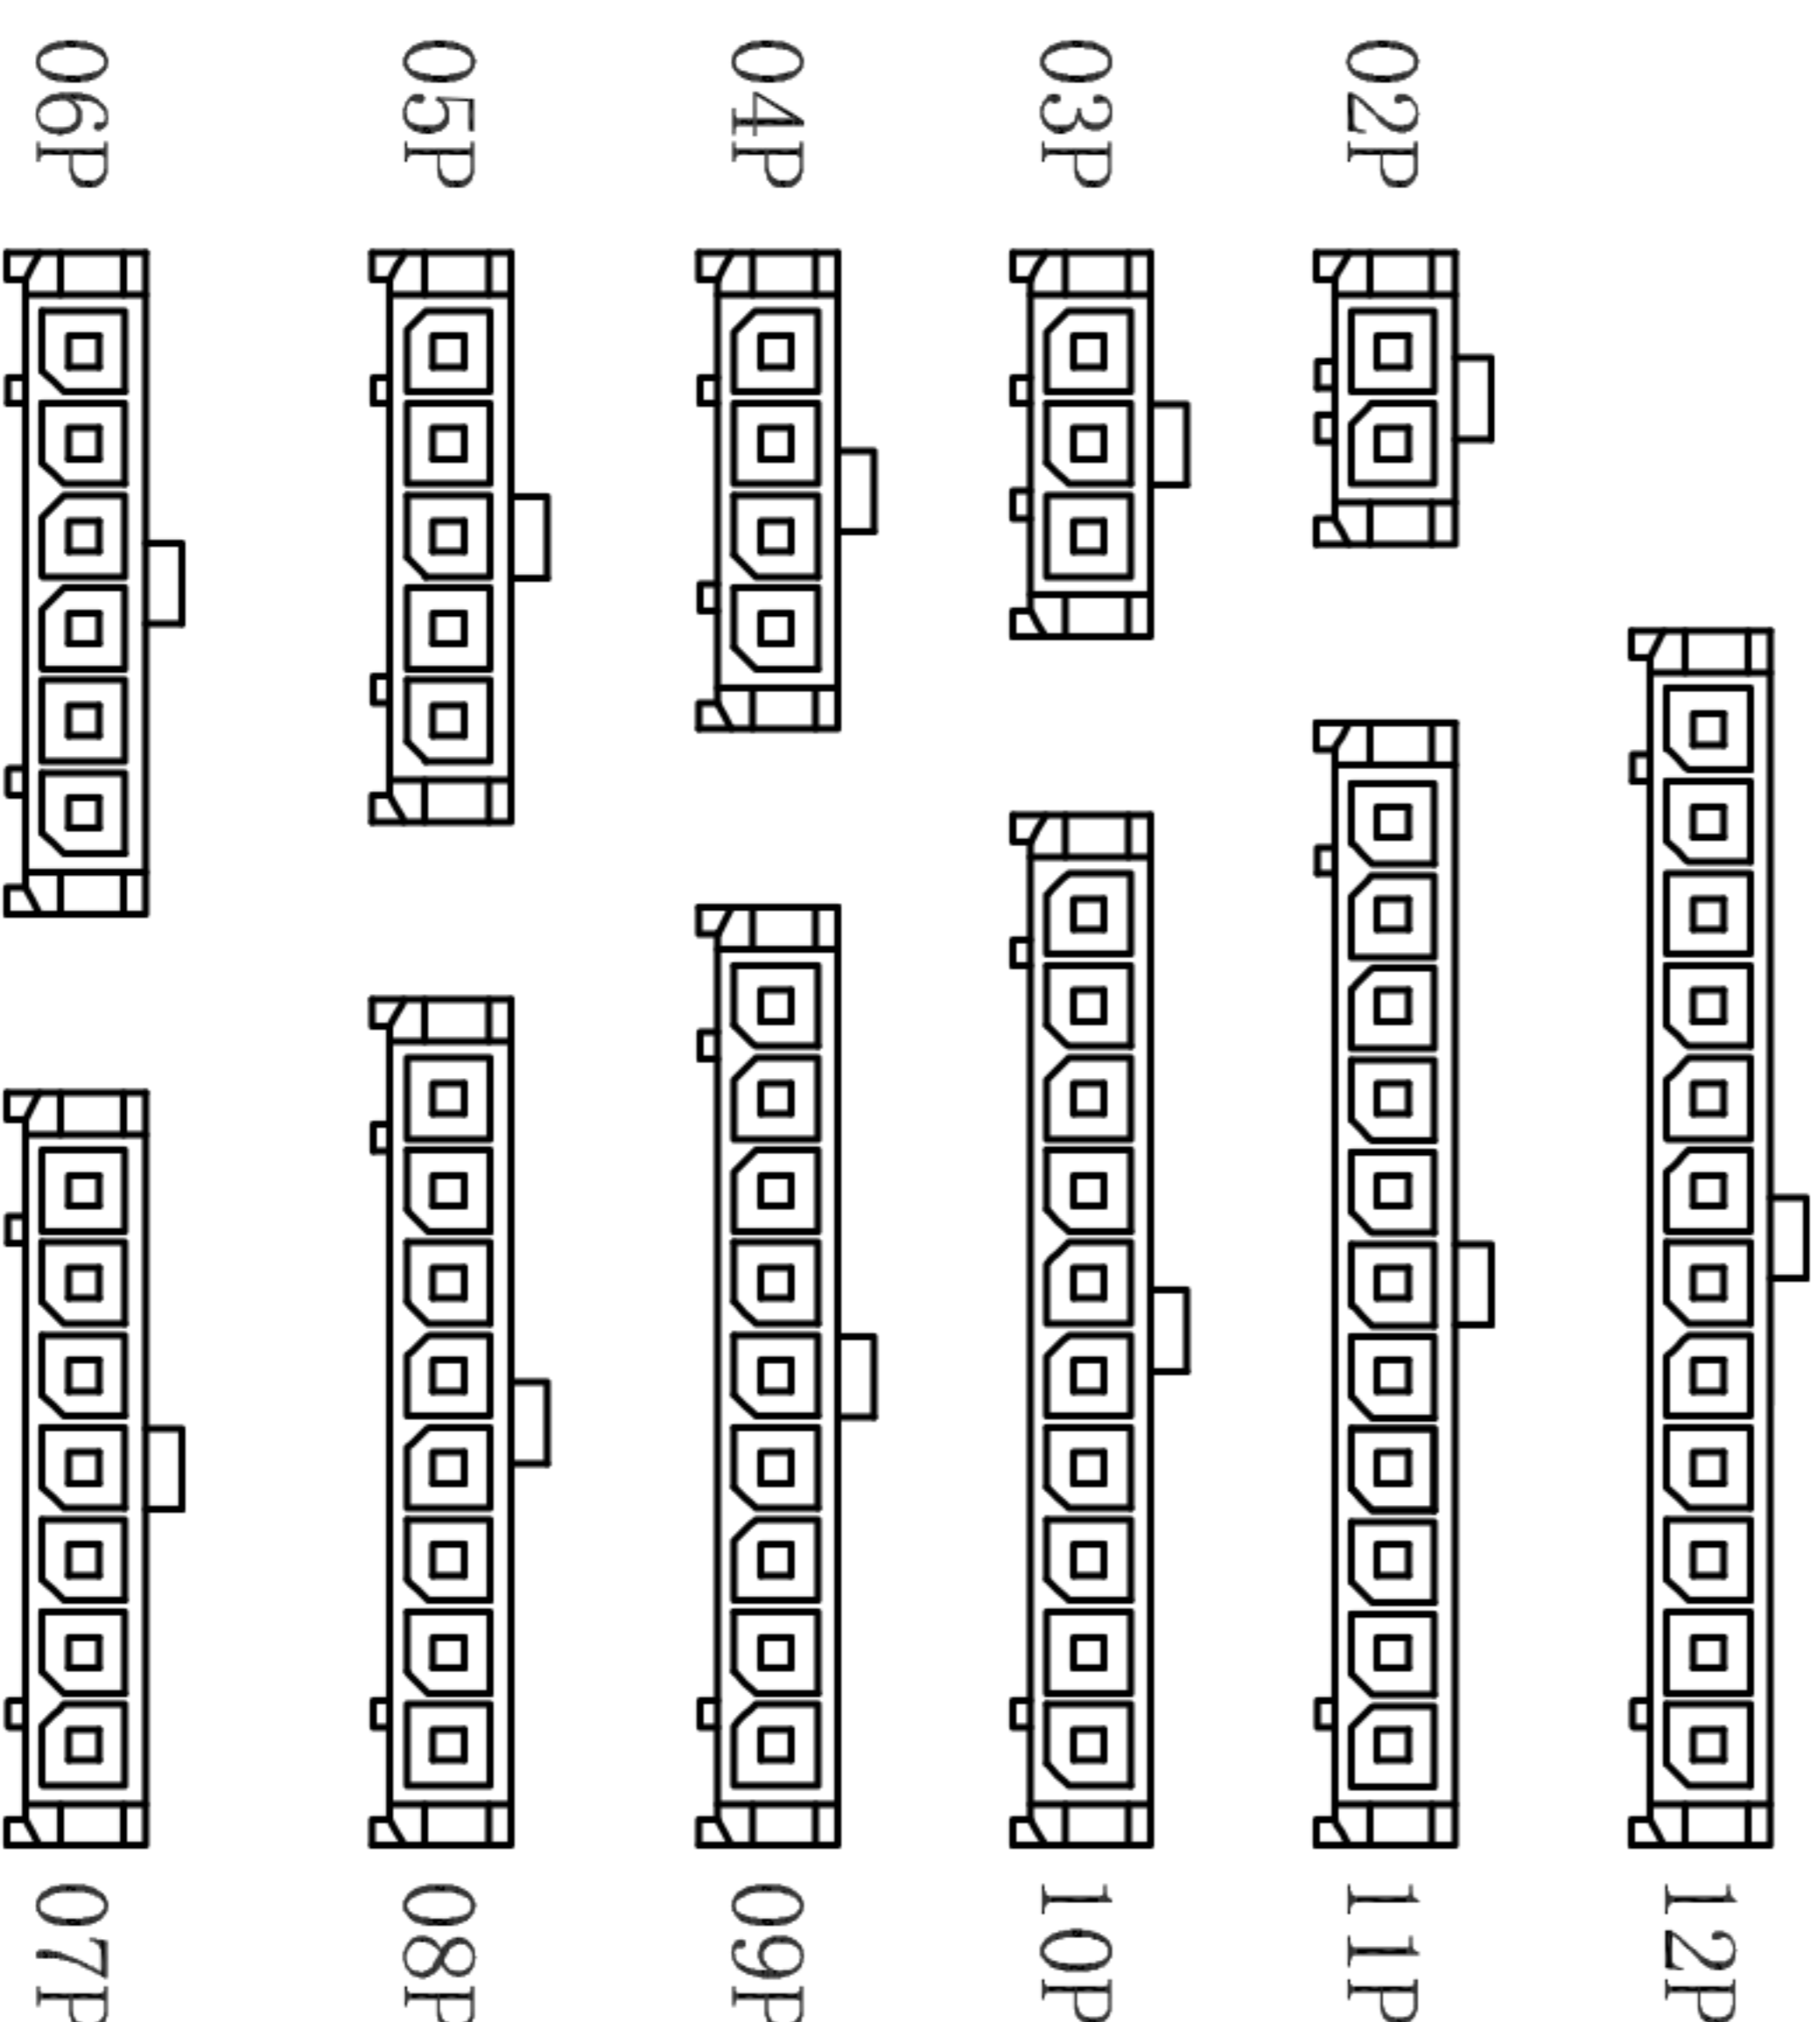

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

APPROVALS		DATE		TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07		PART NO. GP01-3045WV-NP	
CHECKED				SCALE: 1:1	
APPROVALS				PROJ:	
TOLERANCES ARE				UNIT: mm	DRAWING NO.
30~ $\phi$ 以上	$\pm 0.30$	ANGLE	$\pm 2^{\circ}$	SHEET 1 OF 1	
10~30	$\pm 0.20$				
5~10	$\pm 0.15$				
~5	$\pm 0.10$				
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.
	A		NEW		APPRO.