
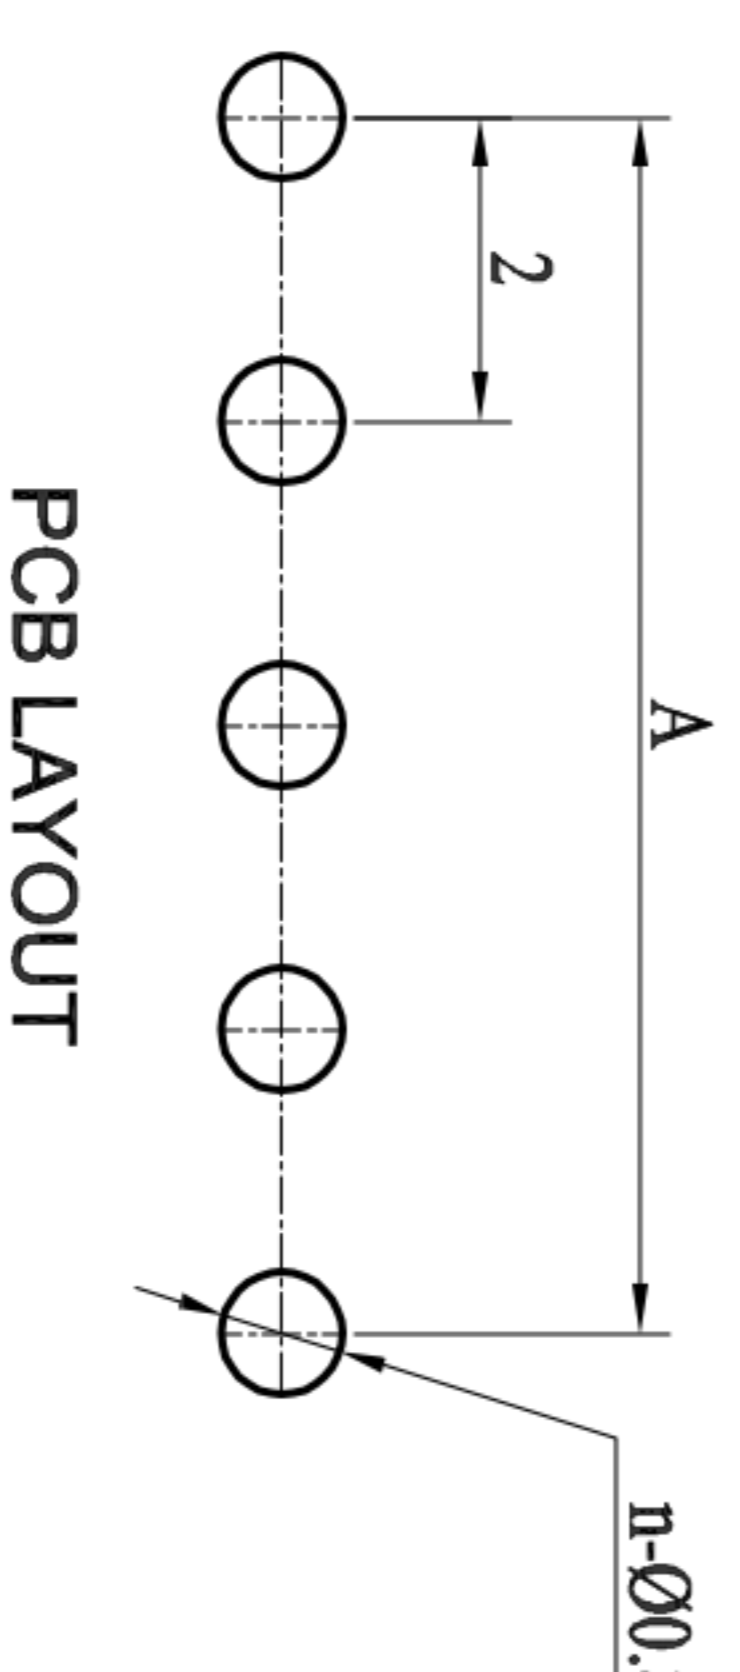
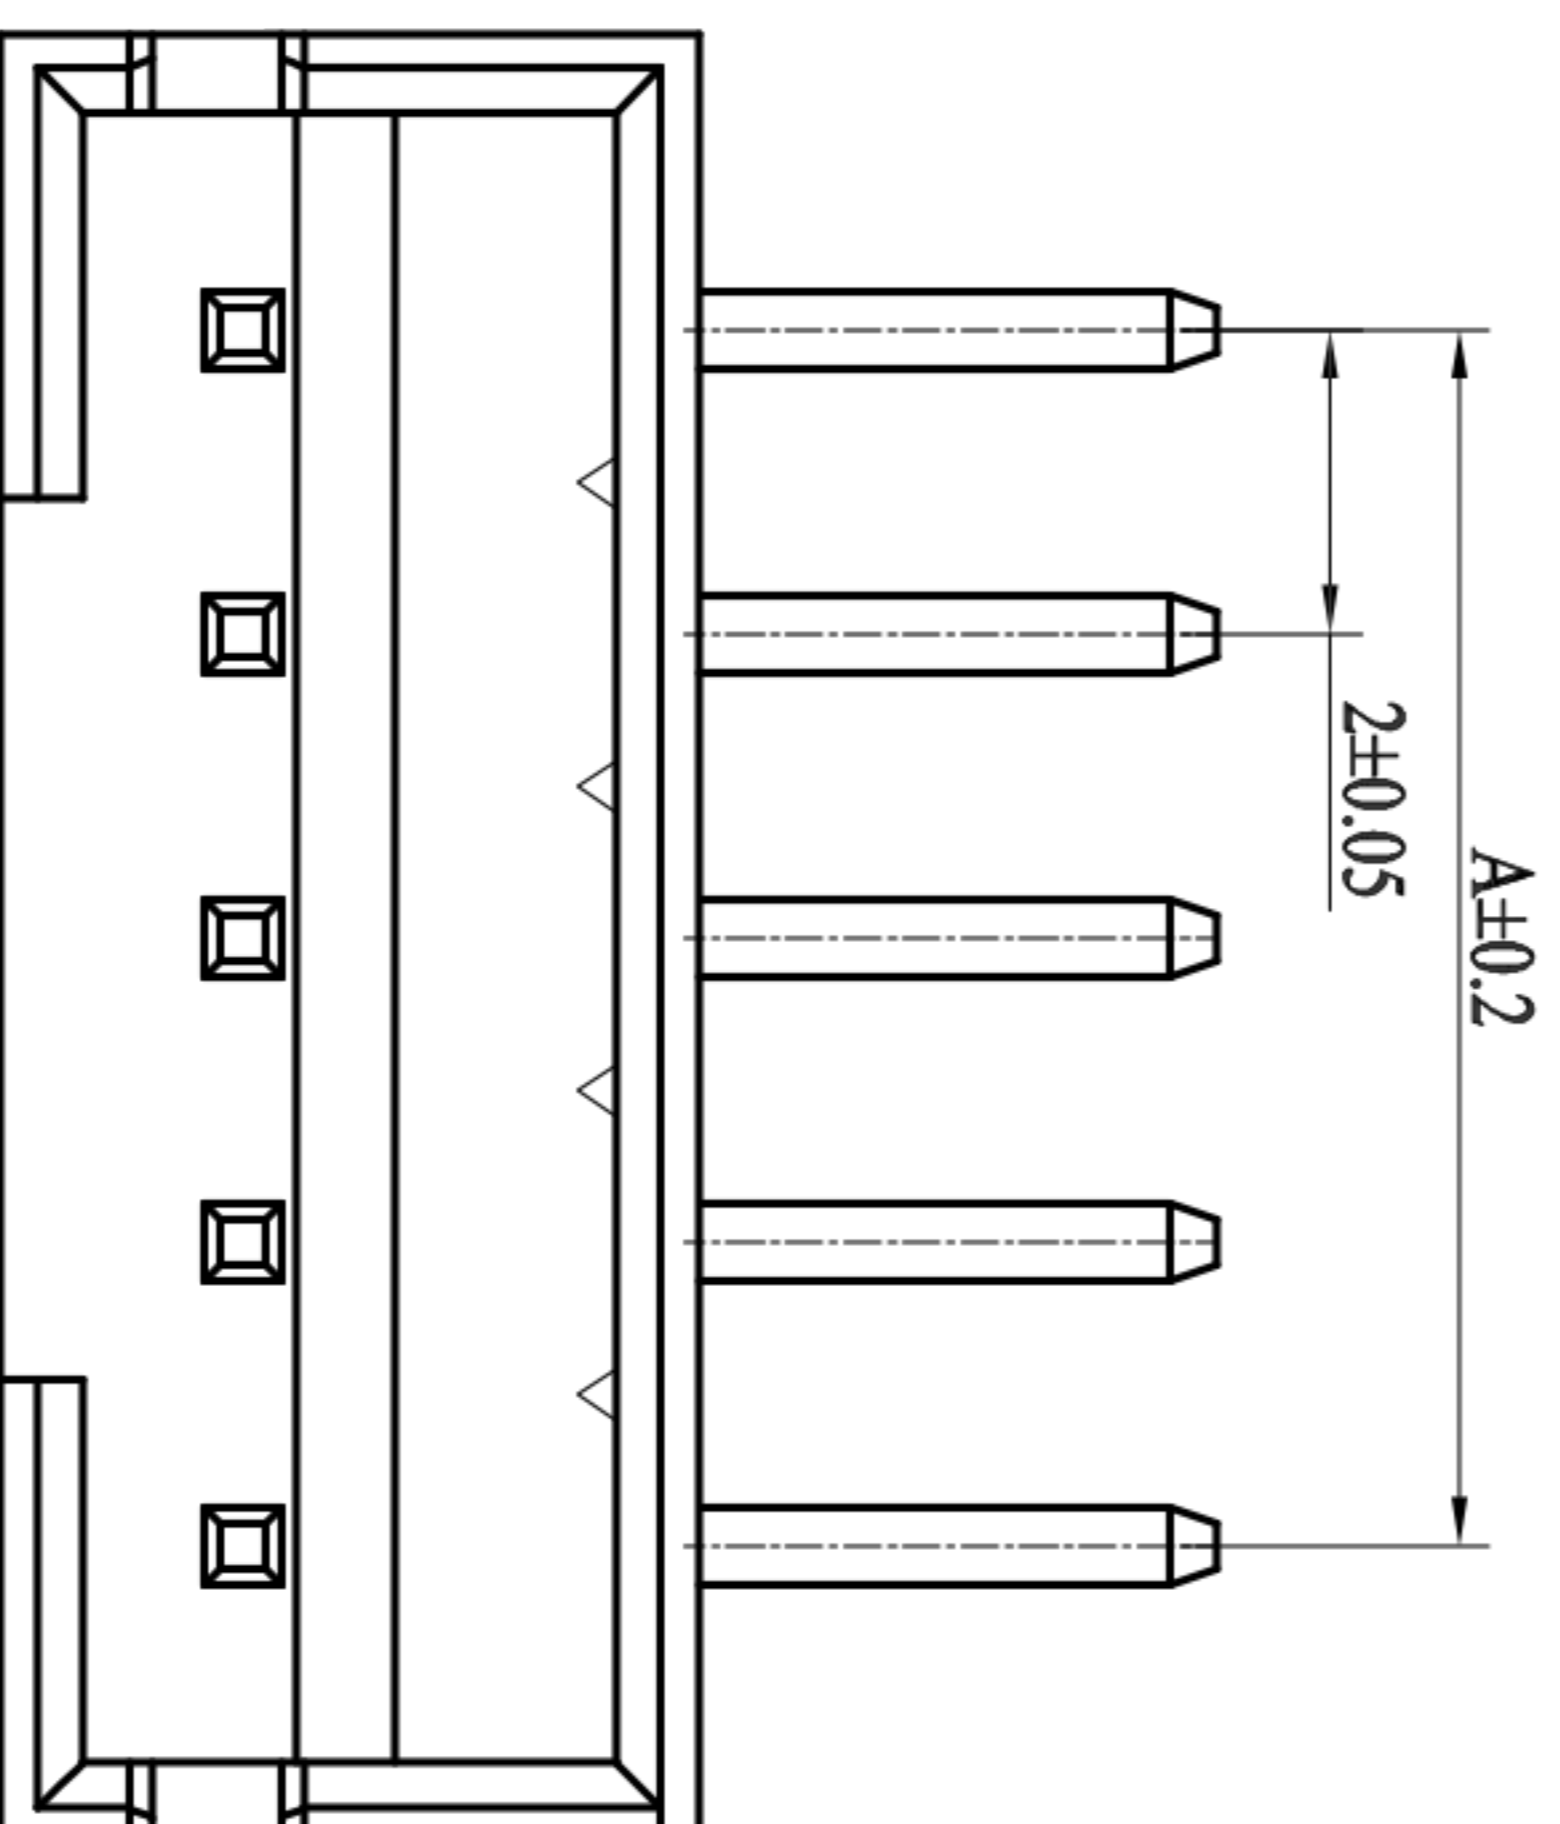


POLES	PART NO	DIMENSIONS(mm)	
		A	B
2	2	2.0	6.1
3	3	4.0	8.1
4	4	6.0	10.1
5	5	8.0	12.1
6	6	10.0	14.1
7	7	12.0	16.1
8	8	14.0	18.1
9	9	16.0	20.1
10	10	18.0	22.1
11	11	20.0	24.1
12	12	22.0	26.1
13	13	24.0	28.1
14	14	26.0	30.1
15	15	28.0	32.1
16	16	30.0	34.1

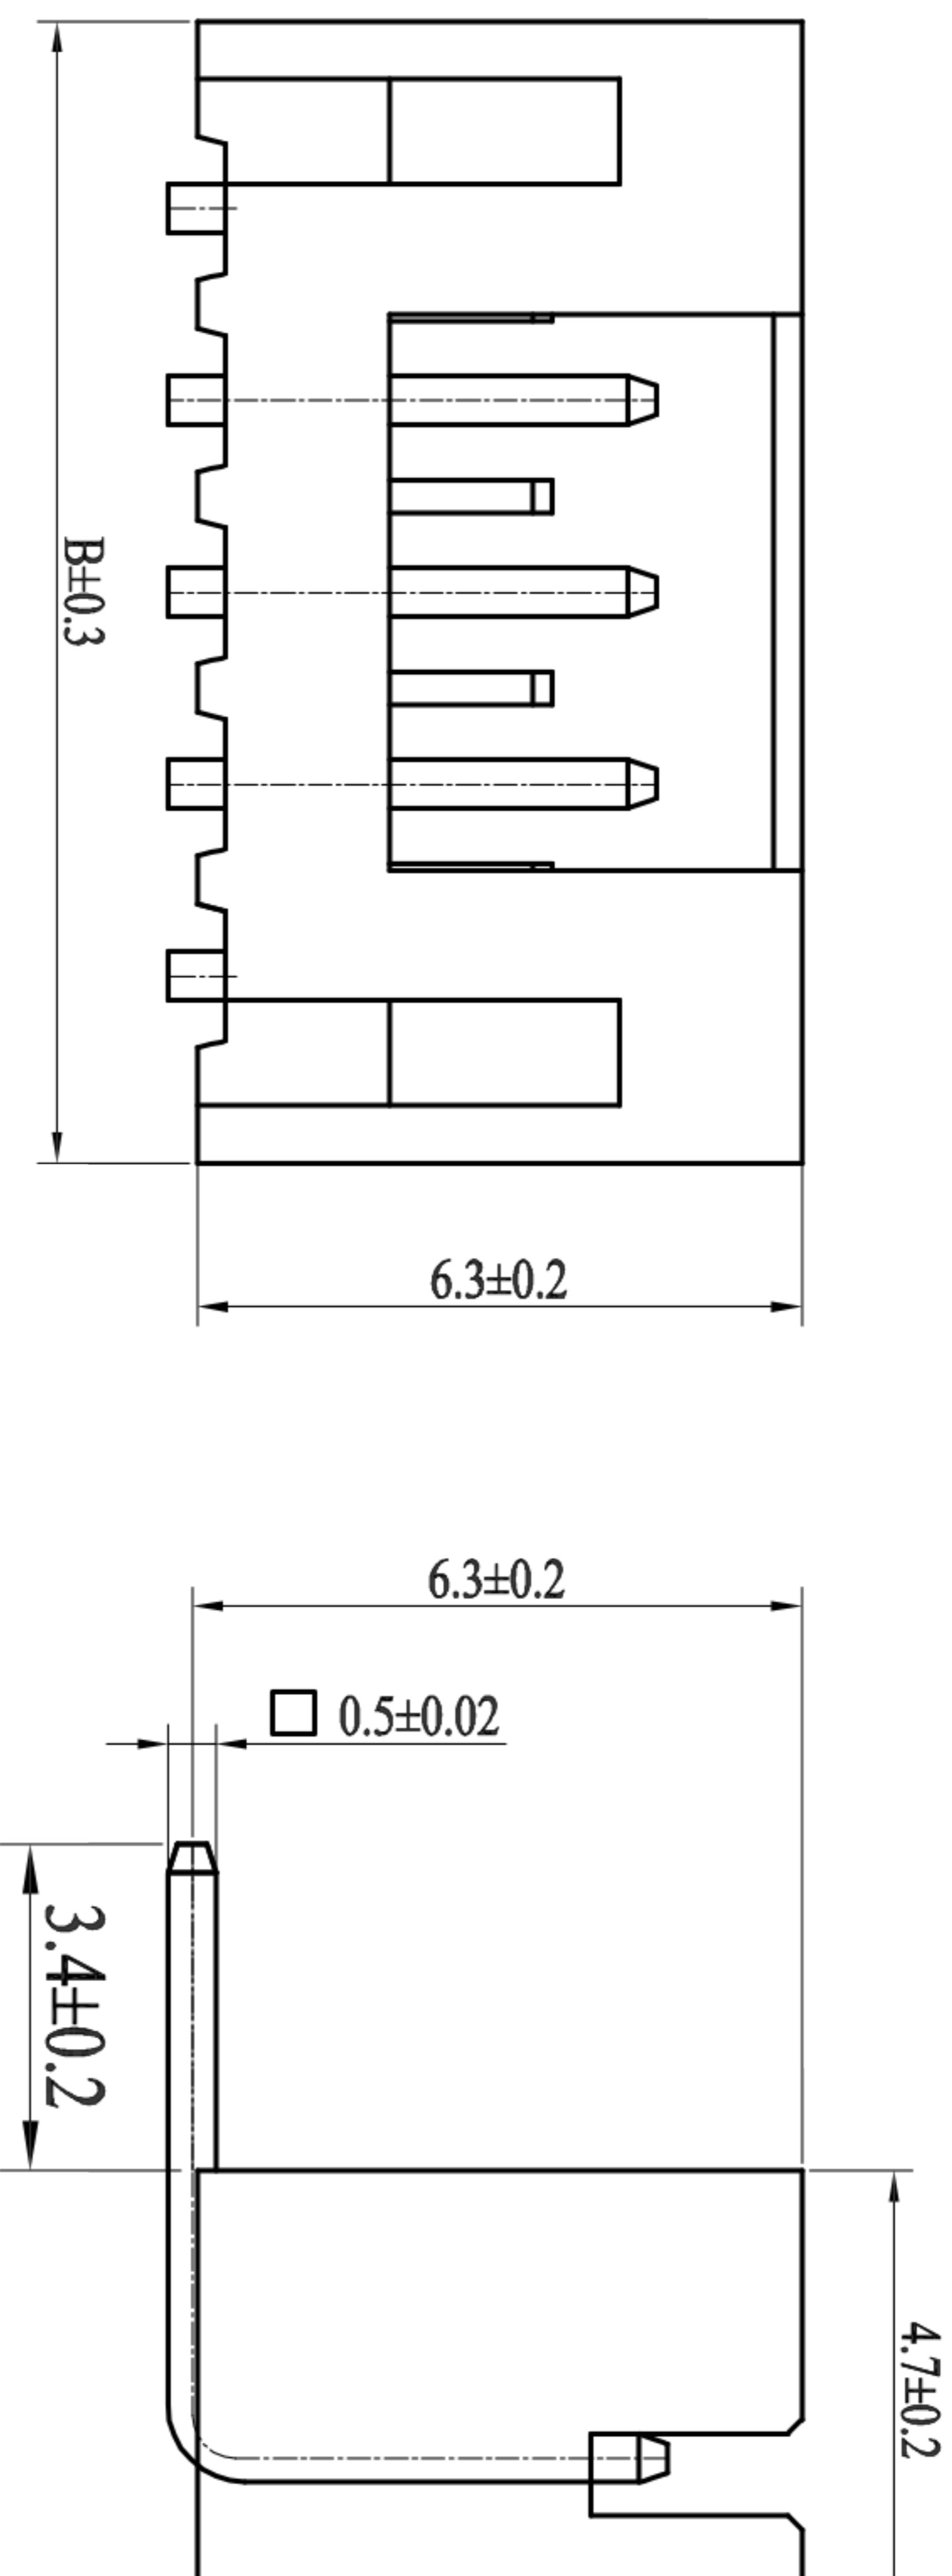

■ 技术参数 (SPECIFICATIONS)

- ◆ 额定电压: 250V AC DC
- ◆ Voltage rating: 250V AC DC
- ◆ 额定电流: 2.0A AC DC MIN
- ◆ Current rating: 2.0A AC DC MIN
- ◆ 耐压值: 800V AC/minute
- ◆ Withstand voltage 800V AC/minute
- ◆ 绝缘电阻: 1000MΩ MIN
- ◆ Insulation resistance: 1000MΩ MIN
- ◆ 接触电阻: 20mΩ MAX
- ◆ Contact resistance: 20mΩ MAX
- ◆ 工作温度: -25°C ~ +85°C
- ◆ Working Temperature: -25°C ~ +85°C
- ◆ 间距: 2.0 mm
- ◆ Pitch: 2.0 mm

■ 材料 (MATERIAL)

- ◆ 外壳: 尼龙66
- ◆ Housing: PA66
- ◆ 插针: 黄铜
- ◆ Pin: Brass

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW

APPROVALS		DATE	TOLERANCES ARE	
DRAWN	ZHIWEI.CHEN	2015.07.07	30~以上	±0.30
CHECKED			10~30	±0.20
APPROVALS			5~10	±0.15
			~ 5	±0.10
TITLE:		PART NO.	ANGLE	UNIT:
		GP01-2001WR-NP	±2°	mm
		SCALE:	1:1	PROJ:
		DRAWING NO.		SHEET
				1 OF 1



深圳市联丰电子有限公司  
SHENZHEN LINFENG ELECTRONIC CO.,LTD