
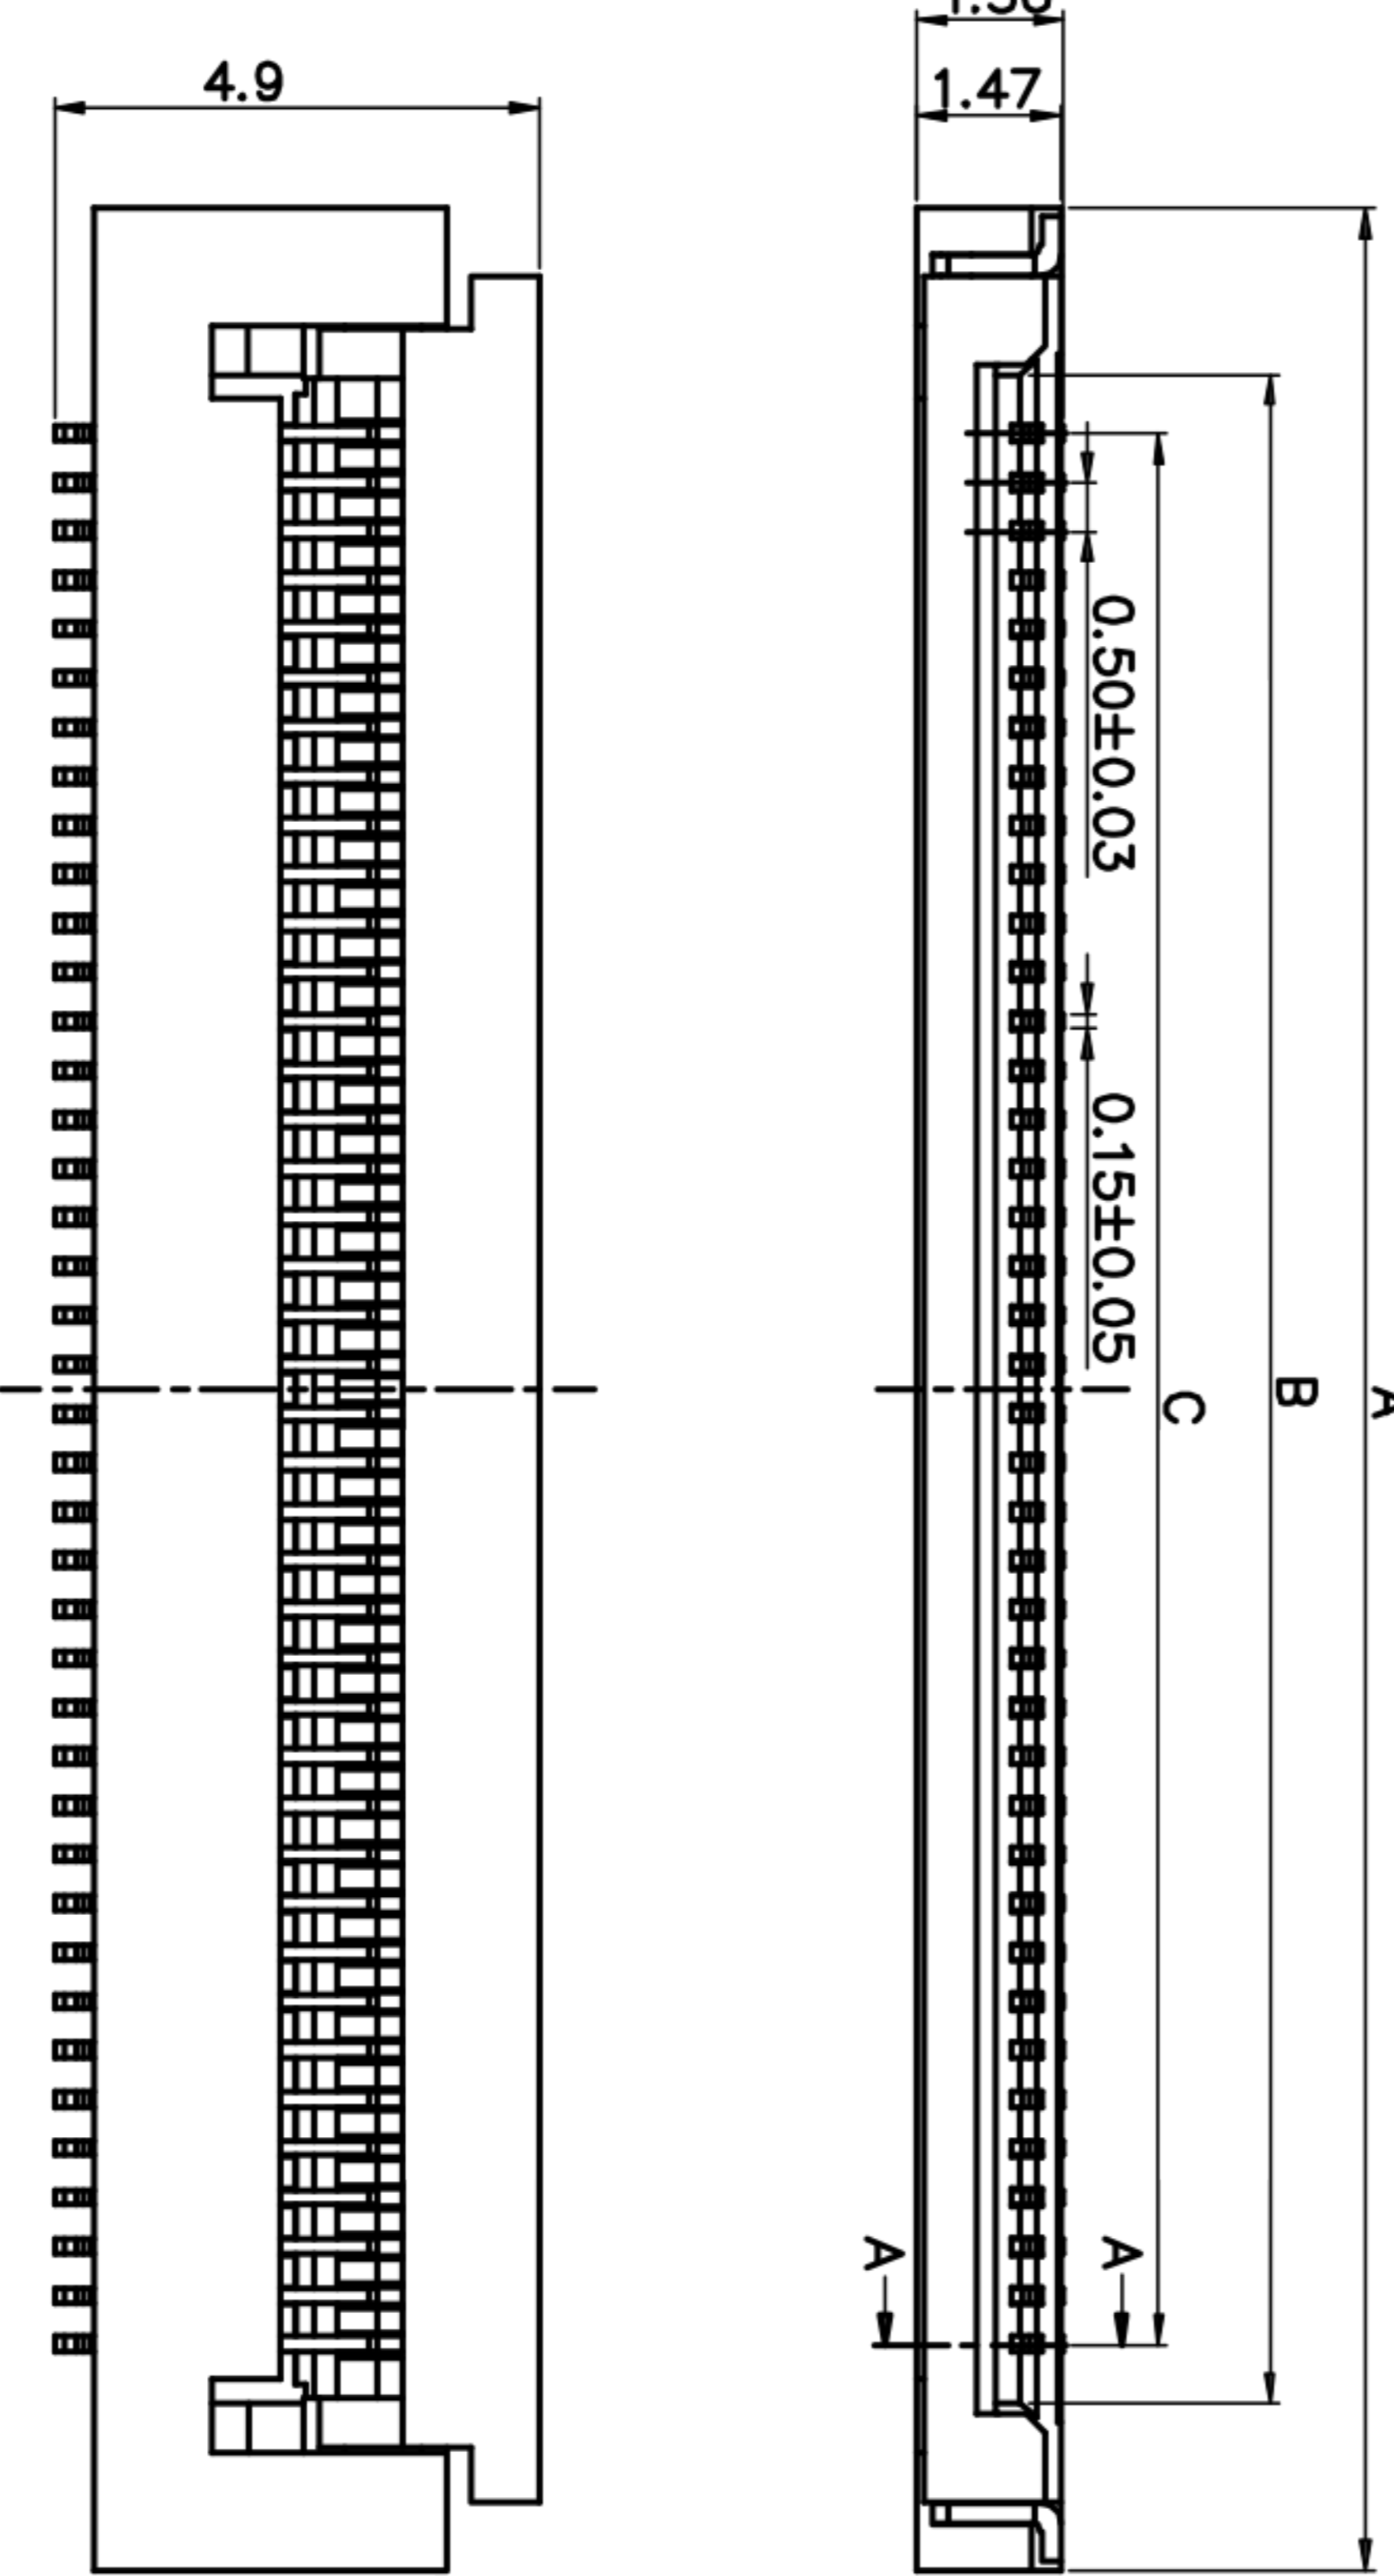


SECTION: A-A
SCALE 1:1

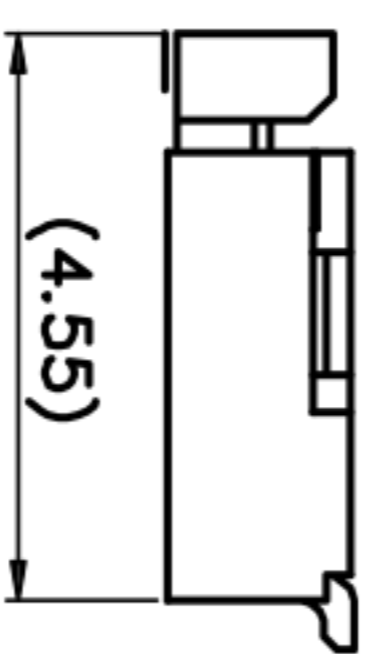

- MATERIAL SPECIFICATION:**
- HOUSING:HEIGHT TEMP. PLASTIC(U194V-0)
 - CONTACT:PHOSPHOR BRONZE
 - FITTING NIAL:BRASS
- ELECTRICAL PERFORMANCE**
- RATED VOLTAGE(MAX.):50V AC/DC
 - RATED CURRENT(MAX.):0.4A AC/DC
 - DIELECTRIC STRENGTH:250V AC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL, NO BREAKDOWN
 - INSULATION RESISTANCE:1000 MEGOHMS MIN.500V DC FOR 1 MINUTE BETWEEN ADJACENT TERMINAL
 - CONTACT RESISTANCE:30 MILLIOHM MAX.
 - OPERATING TEMPERATURE:-25° to +85°

PIN	DIM A	DIM B	DIM C
4	6.1	2.70	1.50
5	6.6	3.20	2.00
6	7.1	3.70	2.50
7	7.6	4.20	3.00
8	8.1	4.70	3.50
9	8.6	5.20	4.00
10	9.1	5.70	4.50
11	9.6	6.20	5.00
12	10.1	6.70	5.50
13	10.6	7.20	6.00
14	11.1	7.70	6.50
15	11.6	8.20	7.00
16	12.1	8.70	7.50
17	12.6	9.20	8.00
18	13.1	9.70	8.50
19	13.6	10.20	9.00
20	14.1	10.70	9.50
21	14.6	11.20	10.00
22	15.1	11.70	10.50
23	15.6	12.20	11.00
24	16.1	12.70	11.50
25	16.6	13.20	12.00
26	17.1	13.70	12.50
27	17.6	14.20	13.00
28	18.1	14.70	13.50
29	18.6	15.20	14.00
30	19.1	15.70	14.50
31	19.6	16.20	15.00
32	20.1	16.70	15.50
33	20.6	17.20	16.00
34	21.1	17.70	16.50
35	21.6	18.20	17.00
36	22.1	18.70	17.50
37	22.6	19.20	18.00
38	23.1	19.70	18.50
39	23.6	20.20	19.00
40	24.1	20.70	19.50
41	24.6	21.20	20.00
42	25.1	21.70	20.50
43	25.6	22.20	21.00
44	26.1	22.70	21.50
45	26.6	23.20	22.00
46	27.1	23.70	22.50
47	27.6	24.20	23.00
48	28.1	24.70	23.50
49	28.6	25.20	24.00
50	29.1	25.70	24.50
51	29.6	26.20	25.00
52	30.1	26.70	25.50
53	30.6	27.20	26.00
54	31.1	27.70	26.50
55	31.6	28.20	27.00
56	32.1	28.70	27.50
57	32.6	29.20	28.00
58	33.1	29.70	28.50
59	33.6	30.20	29.00
60	34.1	30.70	29.50

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	FPC 0.5mm Connector	
CHECKED			PART NO. GP05-WSHA-XP-B-X01	
APPROVALS			SCALE: 1:1	
TOLERANCES ARE		30~DATE	ANGLE	UNIT: mm
	10~30	±0.30	±2°	DRAWING NO.
	5~10	±0.20		
	~5	±0.15		
		±0.10		

深圳市联丰电子有限公司
 SHENZHEN LIANFENG ELECTRONIC CO.,LTD