


**Electrical Characteristics:**  
 Current rating: 0.5A AC/DC  
 Voltage rating: 50V AC/DC  
 Temperature range: -25°C~+85°C  
 Withstand Voltage: 500V AC/Minute  
 Contact Resistance: ≤ 20mΩ  
 Insulation resistance: ≥ 800mΩ  
 Relative Humidity: 93%+40°C

**Material Description:**  
 Terminal: Phosphor Bronze Tin-Leadplated  
 Fitting Nail: Brass Tin-plated  
 Housing: Thermoplastic(UL94V-0)  
 Slider: Thermoplastic(UL94V-0)

PIN数	DIM=A	DIM=B	DIM=C	DIM=D	DIM=E
30P	36.1	34.8	29.00	31.10	5.2
29P	35.1	33.8	28.00	30.10	
28P	34.1	32.8	27.00	29.10	
27P	33.1	31.8	26.00	28.10	
26P	32.1	30.8	25.00	27.10	
25P	31.1	29.8	24.00	26.10	
24P	30.1	28.8	23.00	25.10	
23P	29.1	27.8	22.00	24.10	
22P	28.1	26.8	21.00	23.10	
21P	27.1	25.8	20.00	22.10	
20P	26.1	24.8	19.00	21.10	
19P	25.1	23.8	18.00	20.10	
18P	24.1	22.8	17.00	19.10	
17P	23.1	21.8	16.00	18.10	
16P	22.1	20.8	15.00	17.10	
15P	21.1	19.8	14.00	16.10	
14P	20.1	18.8	13.00	15.10	
13P	19.1	17.8	12.00	14.10	
12P	18.1	16.8	11.00	13.10	
11P	17.1	15.8	10.00	12.10	
10P	16.1	14.8	9.00	11.10	
9P	15.1	13.8	8.00	10.10	
8P	14.1	12.8	7.00	9.10	
7P	13.1	11.8	6.00	8.10	
6P	12.1	10.8	5.00	7.10	
5P	11.1	9.8	4.00	6.10	
4P	10.1	8.8	3.00	5.10	

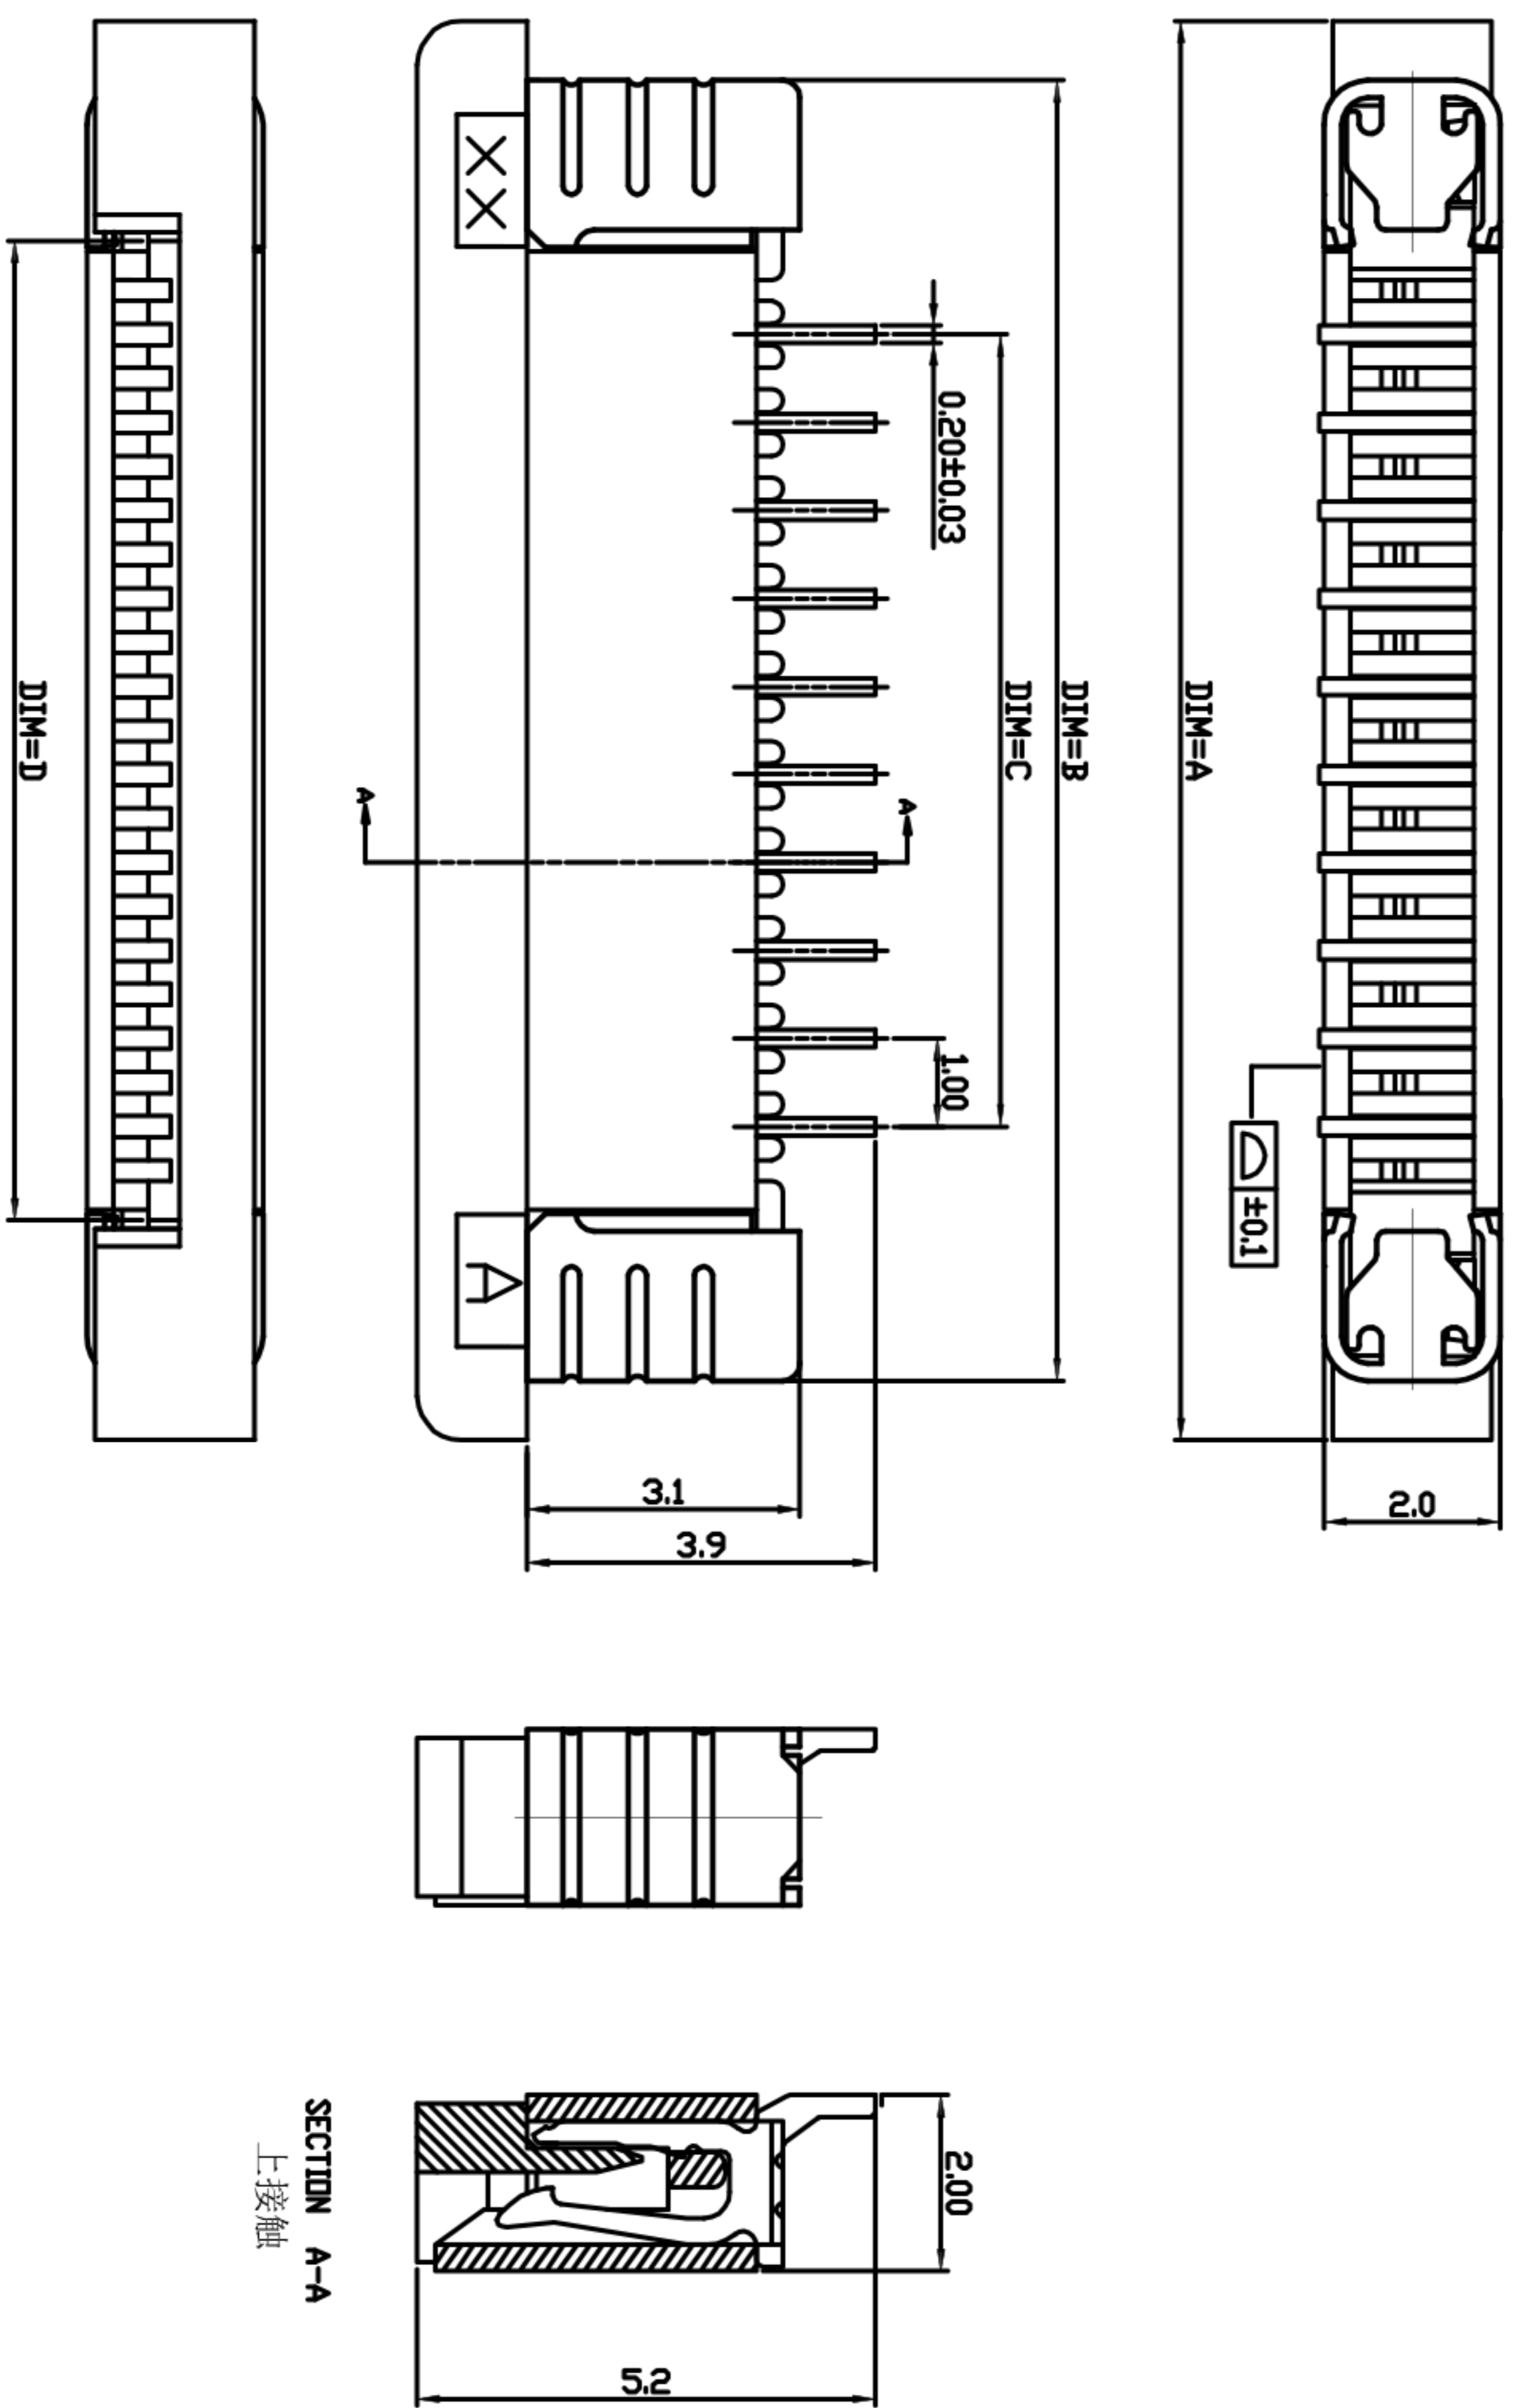

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW
			CHANGE.
			CHECK.
			APPRO.

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	FPC 1.00mm Connector	
CHECKED			PART NO. GP10-WSLN-XXP-C-S01	
APPROVALS			SCALE: 1:1	PROJ. SHEET 1 OF 1
TOLERANCES ARE		ANGLE	UNIT: mm	DRAWING NO.
30~以上	±0.30	±2°		
10~30	±0.20			
5~10	±0.15			
~ 5	±0.10			

**深圳市联丰电子有限公司**  
 SHENZHEN LINFENG ELECTRONIC CO.,LTD