
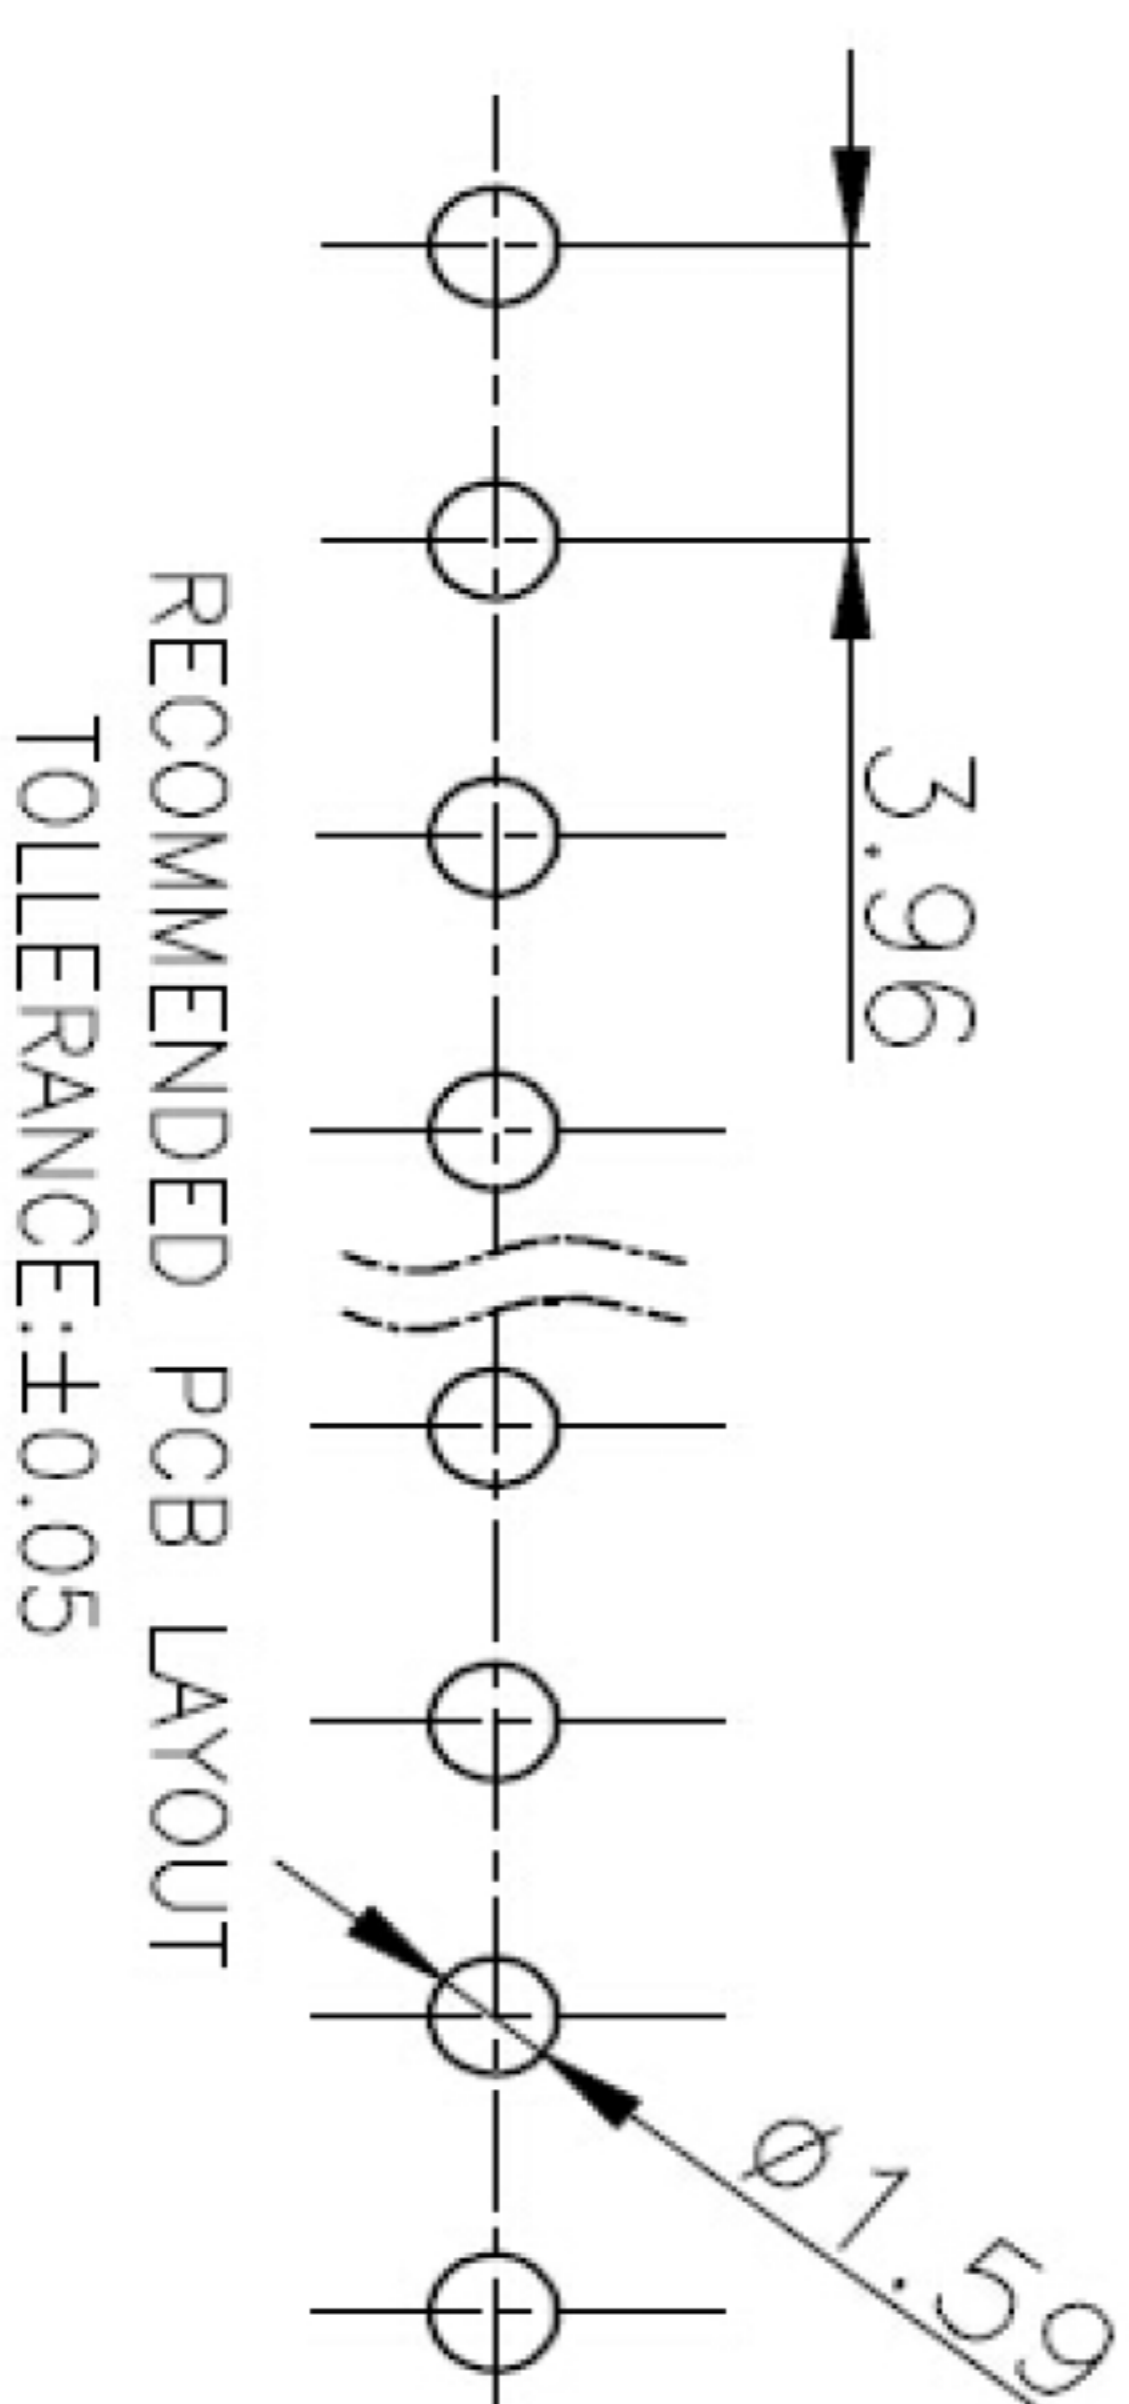
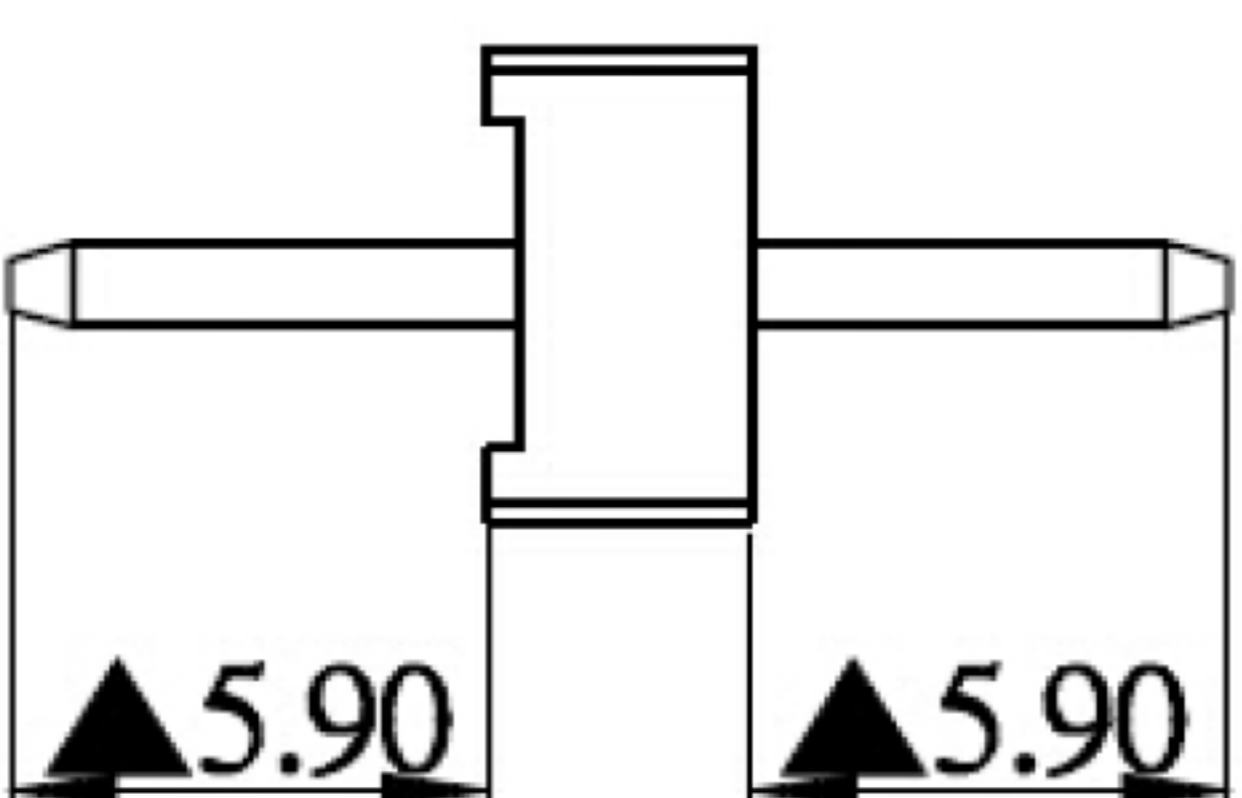


SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temp.: -40°C+105°C
 Max Processing Temp.: 260°C for 30 60 seconds
 (Nylon-LCP) (290°C for 10 seconds)
 Contact Material: Copper alloy
 Insulator Material: Nylon LCP
 (*Standard: LCP)
 Plated(*Standard): Gold flash all over

+0.1
 -0.5

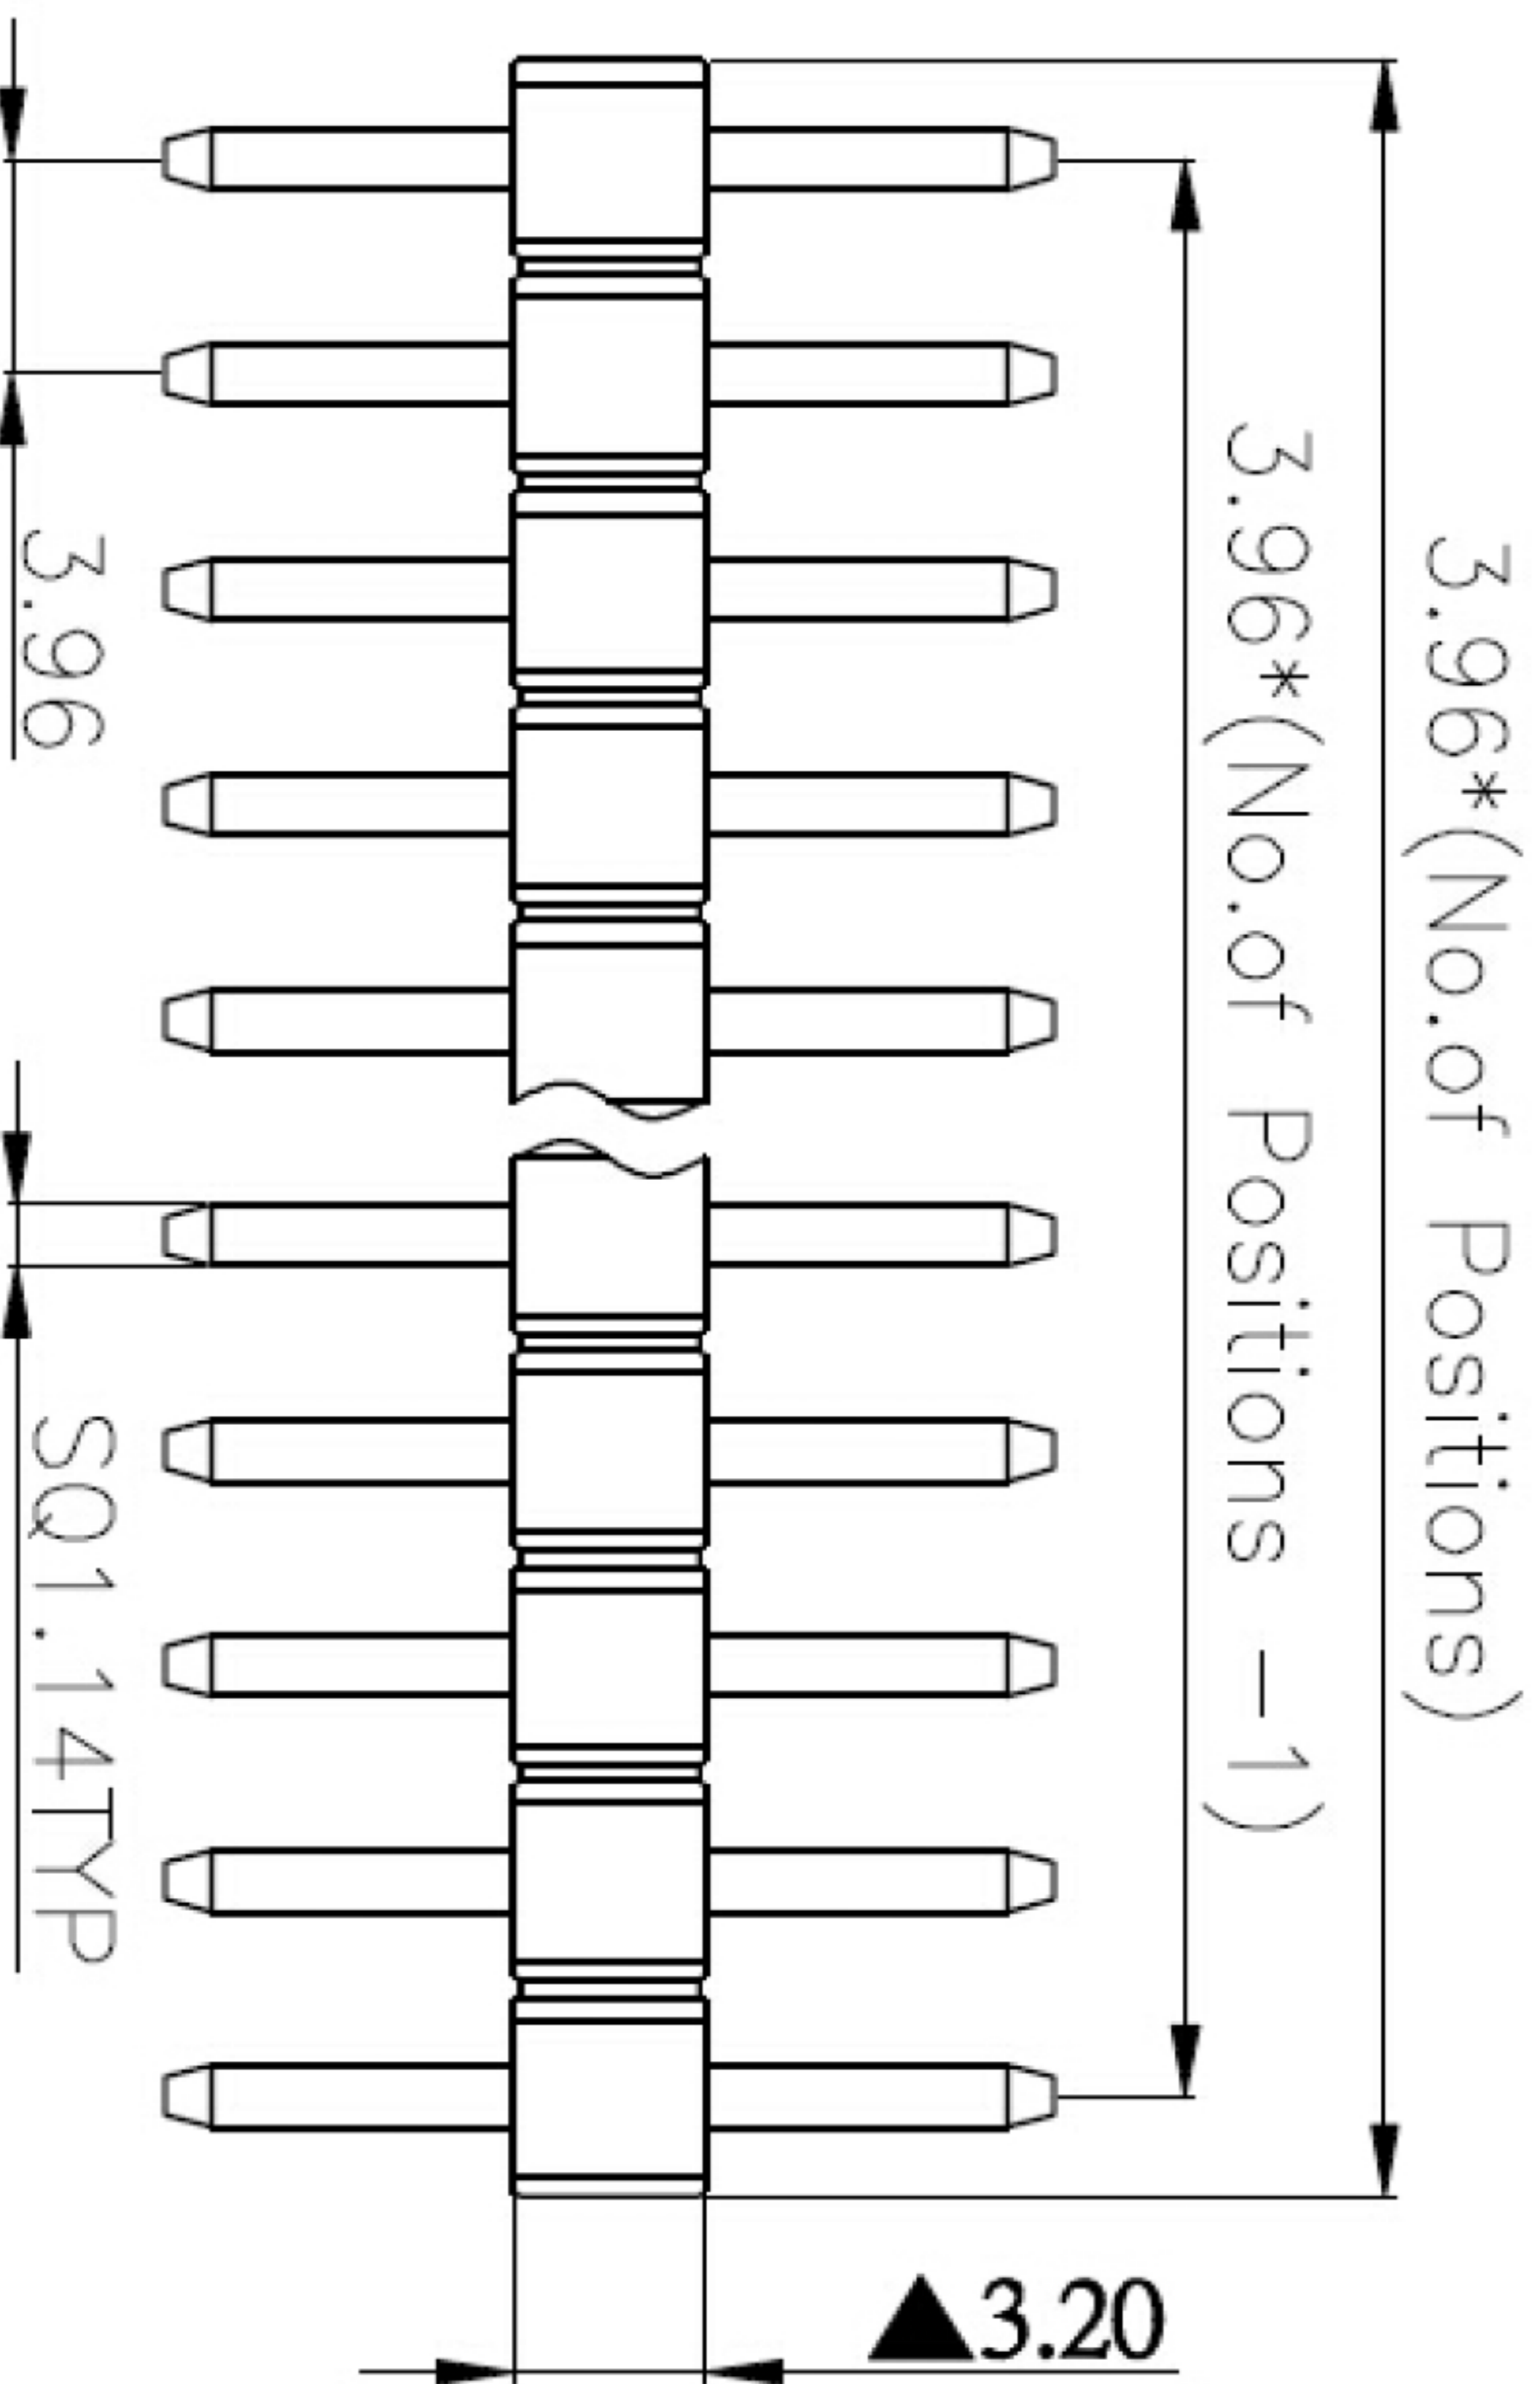

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	<p>深圳市联丰电子有限公司 SHENZHEN LINFENG ELECTRONIC CO.,LTD</p>
DRAWN	ZHIWEI.CHEN	2015.07.07	
CHECKED			
APPROVALS		TITLE:	*****
TOLERANCES ARE		PART NO.	GP26-3966WV-NP
30~以上	±0.30	ANGLE	
10~30	±0.20	UNIT: mm	SCALE: 1:1
5~10	±0.15	DRAWING NO.	PROJ:
~ 5	±0.10		SHEET 1 OF 1