


RECOMMENDED PCB LAYOUT
(ALL TOLERANCES ARE ±0.05)

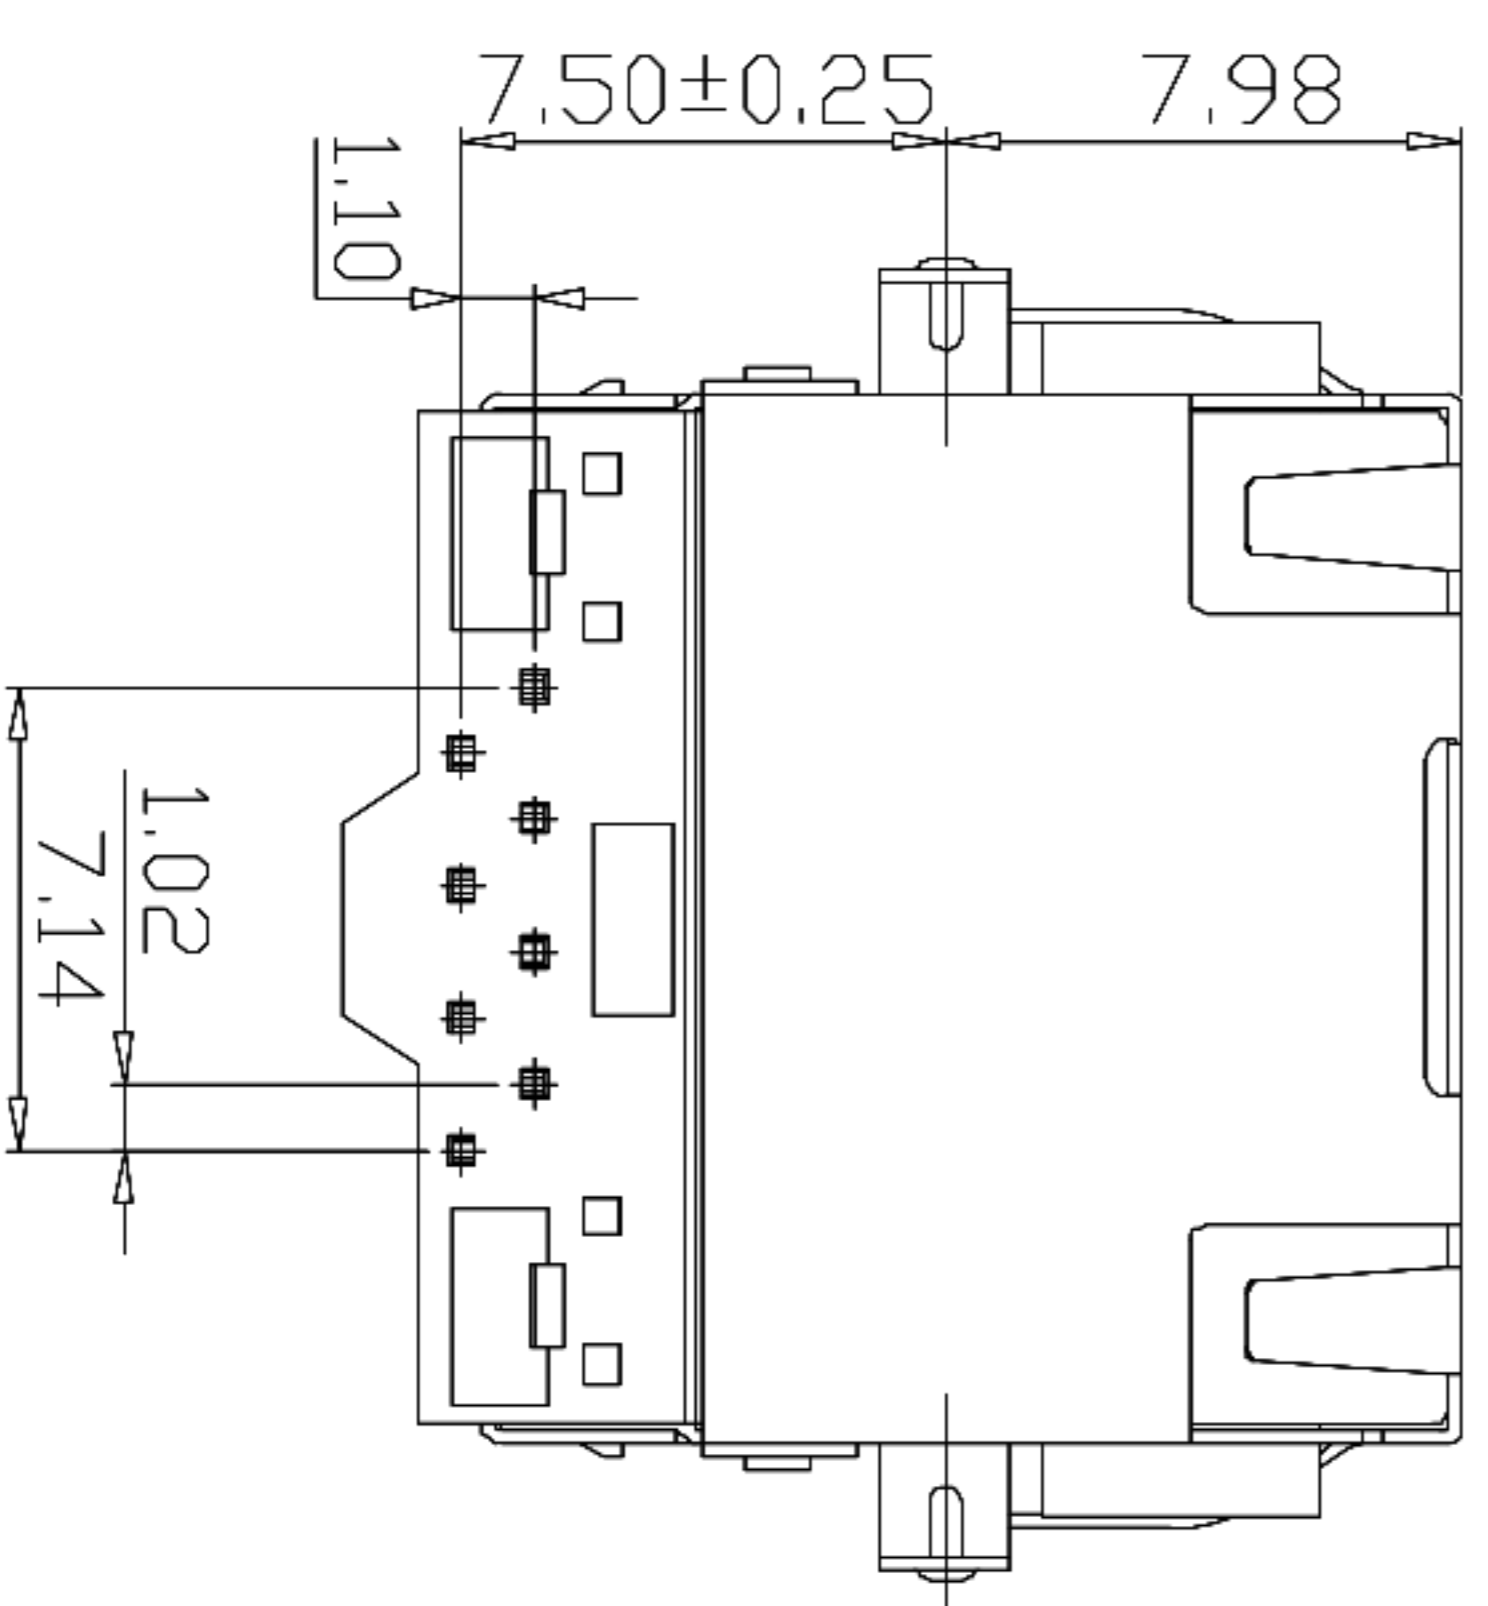

- SPECIFICATIONS:
1. Voltage: 150V AC RMS
 2. Current Rating: 1.5A
 3. Contact Resistance: 30mΩ MAX.
 4. Insulation Resistance: 500MΩ MIN.
 5. Dielectric Withstand Voltage :1000V AC
 6. Operature Temperature: -40°C~80°C
 7. Durability: 500 Mating Cycles MIN.

3	Shielding	1	Brass	Ni Plating	
2	Terminal	8	Phosphor Bronze	PLATING & COLOR	
1	Housing	1	PBT	BLACK	
NO.	PART NAME	Q'TY	MATERIAL	Material & Plating	Remark

APPROVALS		DATE	<p>深圳市联丰电子有限公司 SHENZHEN LINFENGYING ELECTRONIC CO.,LTD</p>
DRAWN	ZHANGCHEN	2015.07.07	

CHECKED		TITLE:	RJ CONNECTOR
APPROVALS		PART NO.	RJ45-6W11-CDN-AA-88-B1

TOLERANCES ARE	30°	±0.30	ANGLE	±2°	DRAWING NO.	
	10°-30°	±0.20				
	5°-10°	±0.15				
		±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRD.
	A		NEW			