


P. C. B. LAYOUT

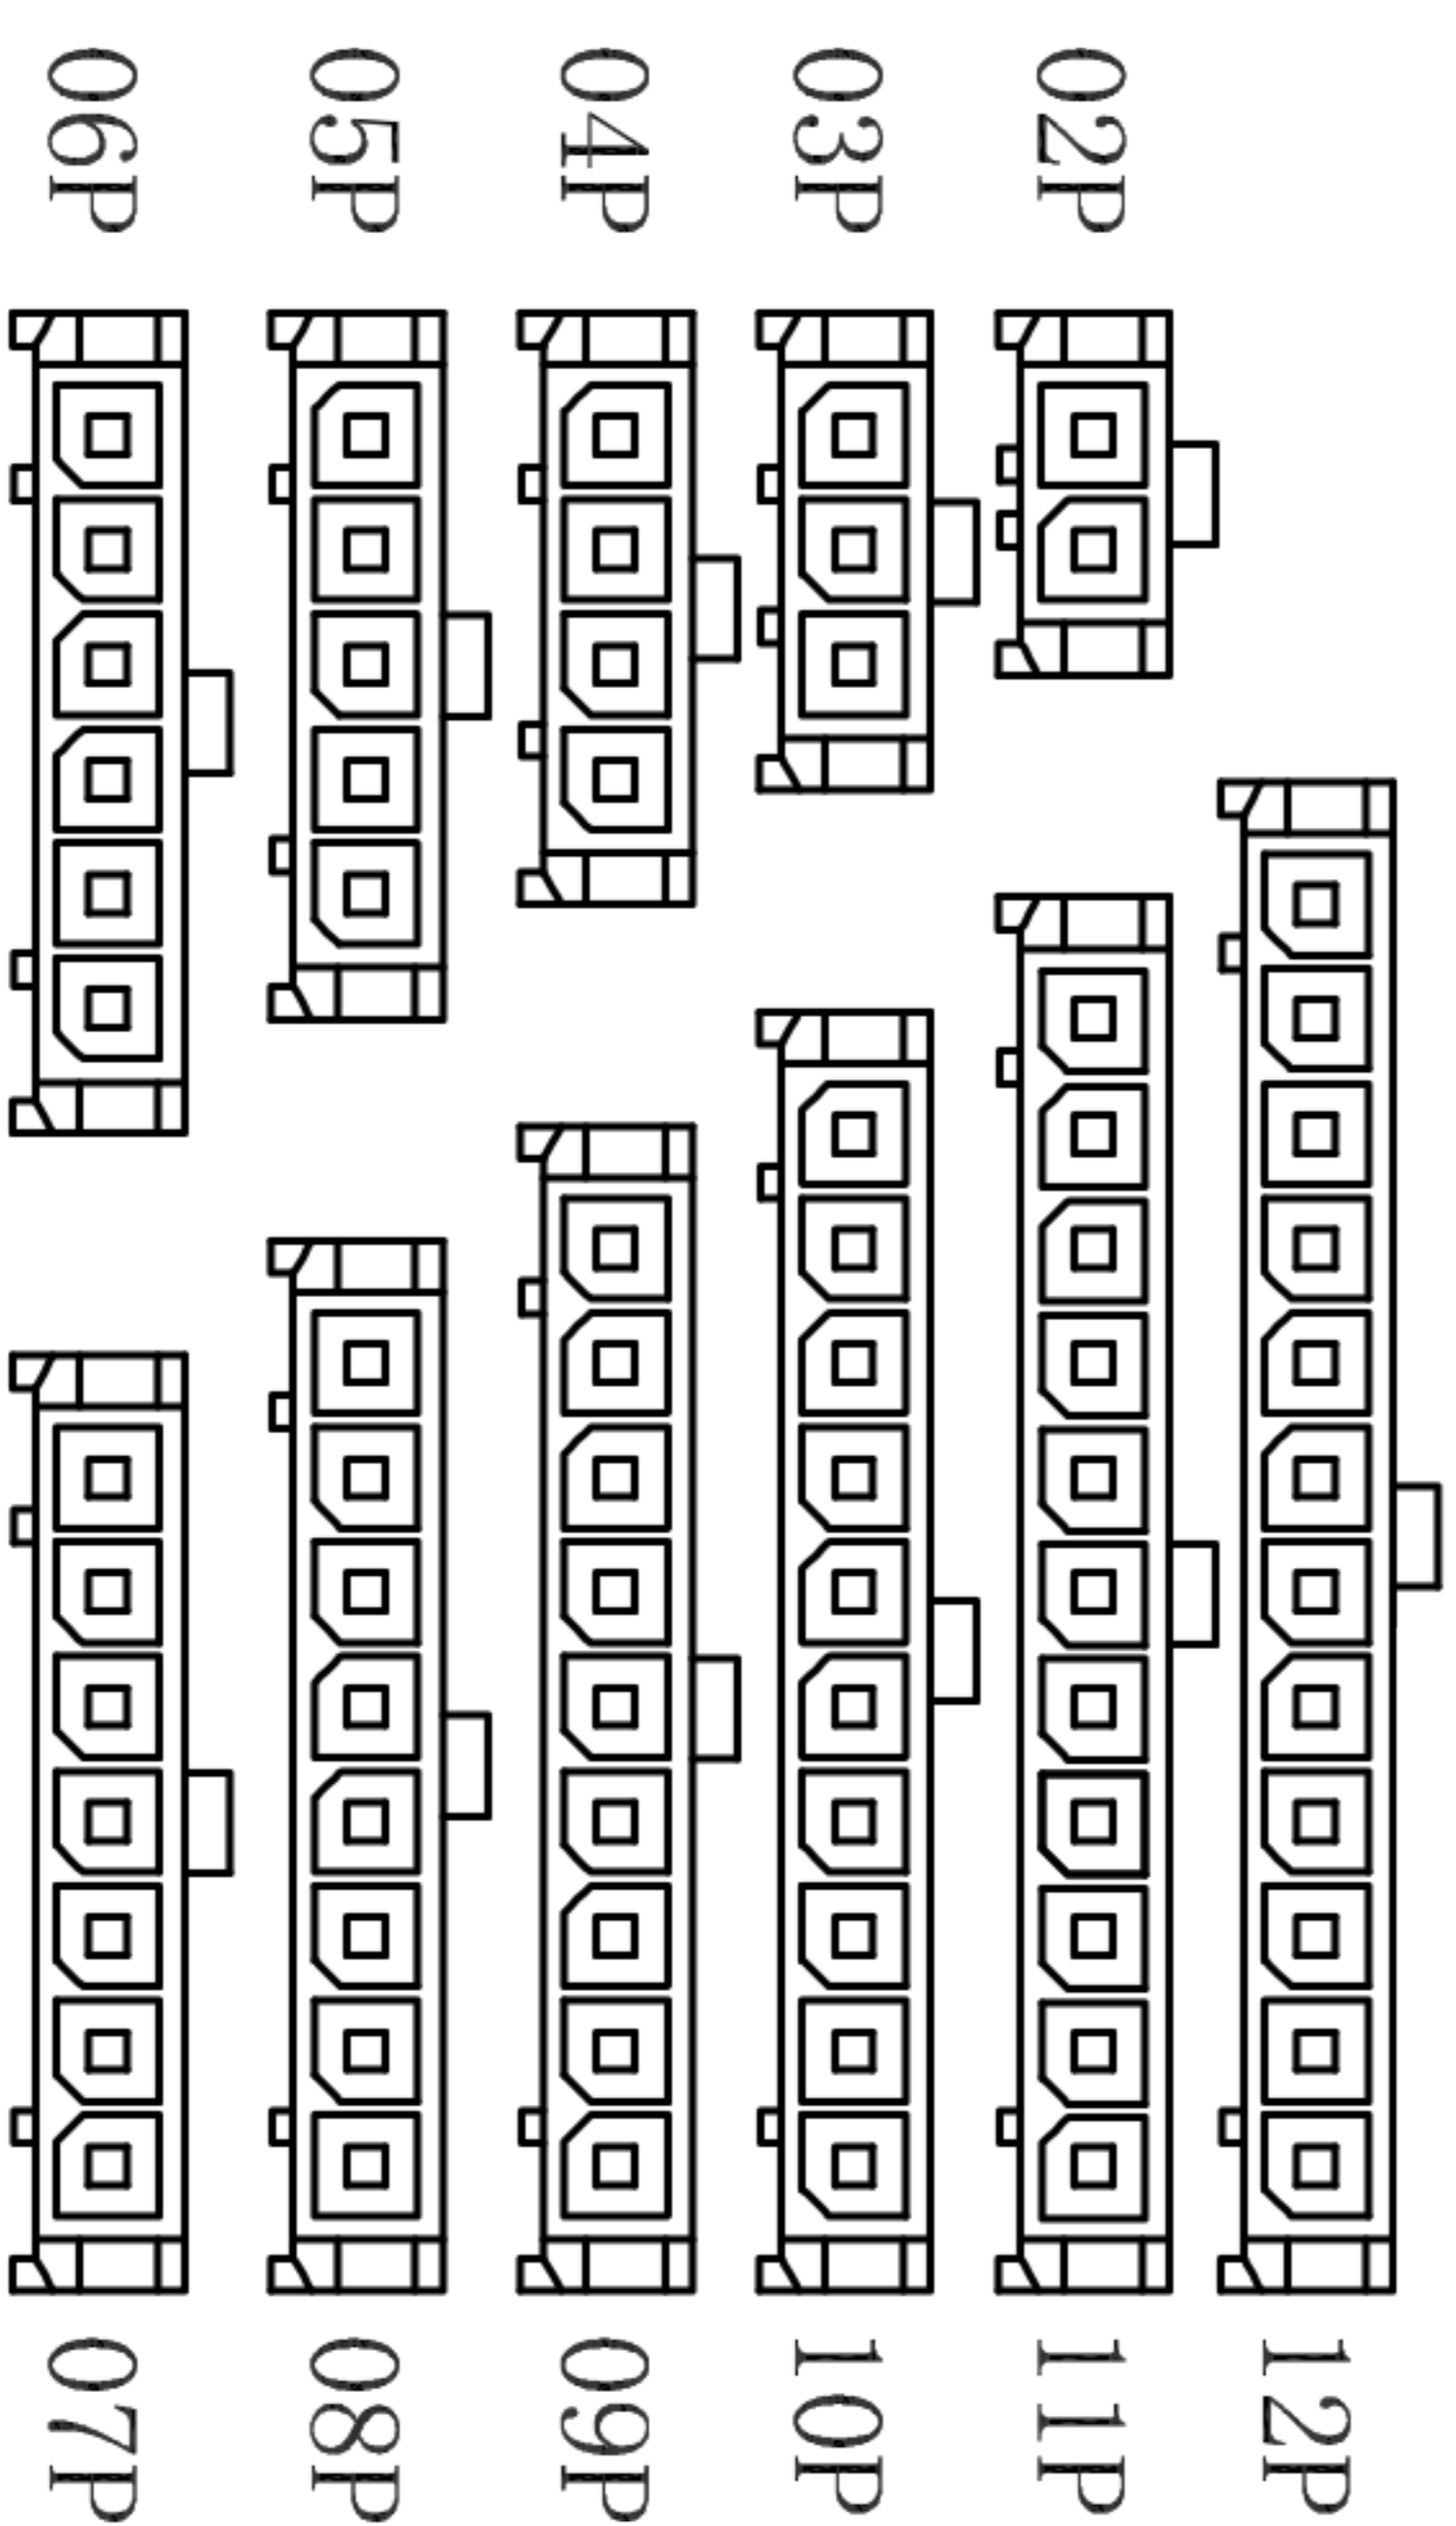

Part No	Dimensions (mm)		
	A	B	C
02	9.65	3.00	7.30
03	12.65	6.00	10.30
04	15.65	9.00	13.30
05	18.65	12.00	16.30
06	21.65	15.00	19.30
07	24.65	18.00	22.30
08	27.65	21.00	25.30
09	30.65	24.00	28.30
10	33.65	27.00	31.30
11	36.65	30.00	34.30
12	39.65	33.00	37.30

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : 3045WRS-NP-L
- Poles : 02-12P
- Housing Material: LCP UL94V-0 Black
- Ter Material: Brass
- Solder Tabs Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

APPROVALS		DATE		TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07		PART NO. GP01-3045WRS-NP-L	
CHECKED				SCALE: 1:1	
APPROVALS				PROJ. SHEET 1 OF 1	
TOLERANCES ARE				30~以上 ±0.30	ANGLE
				10~30 ±0.20	UNIT: mm
				5~10 ±0.15	SCALE: 1:1
				~ 5 ±0.10	DRAWING NO.
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.
	A		NEW		